# S200 Series Servo Drive

Industry-leading Performance in a Small Package





# **KOLLMORGEN**

www.motiontech.com.au

# Removing the Barriers of Design, Sourcing, and Time

At Kollmorgen, we know that OEM engineers can achieve a lot more when obstacles aren't in the way. So, we clear obstacles in three important ways:

#### **Integrating Standard and Custom Products**

The optimal solution is often not clear-cut. Our application expertise allows us to modify standard products or develop totally custom solutions across our whole product portfolio so that designs can take flight.

### **Providing Motion Solutions, Not Just Components**

As companies reduce their supplier base and have less engineering manpower, they need a total system supplier with a wide range of integrated solutions. Kollmorgen offers complete solutions as well as motion subsystems that combine programming software, engineering services and best-inclass motion components.

#### **Global Footprint**

With direct sales, engineering support, manufacturing facilities, and distributors spanning the Americas, Europe, the Middle East, and Asia, we're close to OEMs worldwide. Our proximity helps speed delivery and lend support where and when they're needed.


#### **Financial and Operational Stability**

Kollmorgen is part of Altra Industrial Motion. A key driver in the growth of all Altra divisions is the Altra Business System, which relies on the principle of "kaizen" – or continuous improvement. Using worldclass tools, cross-disciplinary teams of exceptional people evaluate processes and develop plans that result in superior performance.

# Kollmorgen: Your partner. In Motion.

# Self-help Tools

#### Motioneering<sup>®</sup> Online



Size and select the right product for your application needs

#### **Drawing Generator**



Provide TBM/KBM/AKM 2D and 3D drawings in many popular formats

#### Kollmorgen Developer Network

| Getting Started   | Latest Posts   |  |
|---|--|--|
| Nee to KONT Here are a their<br>gas to help you get answers,<br>genory.<br>Decisit the timestary fillers a<br>teach the timestary fillers a<br>teach their parameter<br>ansatz fail for the answerst<br>or answerst fail for the<br>sametary fail from the<br>assembling fail fail for the<br>fail fail for the<br>fail fail for the<br>fail fail fail for the<br>fail fail fail fail for the<br>fail fail fail for the<br>fail fail fail fail for<br>the<br>fail fail fail fail fail fail fail for<br>the<br>fail fail fail fail fail fail fail fail | entrome  | NVD Releases<br>to a second secon  |
| to date details. What hardware<br>tension, spectrag system, and<br>a software writein to also all and<br>a software writein as you all of the<br>proteins, write posterio.  | Sequences<br>interactions<br>interactions<br>COMMICS and Constructions<br>COMMICS and Committee Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee<br>Committee | Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contraction<br>Contra |

Find answers to many key technical questions or start your own session

# Powerful, yet Compact

Kollmorgen S200 servo drives are one of the most compact servo drives on the market. Whether you are looking for 120Vac/240Vac input or 20-90Vdc input, we can fit in your smallest machine.



#### Increased Machine Throughput and Longer Life

Servo system performance is synonymous with machine throughput. The S200 family takes servo performance to new heights.

- » Industry-leading current loop bandwidth up to 5 KHz and velocity loop bandwidth up to 800 Hz means machine throughput can be increased by as much as 2 to 3 times.
- » Robust design including full fault protection, locking connectors and optical isolation promise greater machine "uptime".
- » Smooth motion, a benefit of sinusoidal current control and high resolution (24-bit) feedback, minimizes harsh torque disturbances that can cut short the life of mechanical components.
- » Both the AC and the DC input drives are equipped with separate control power input to speed recovery from "E-Stop" conditions.

### **Reduced Engineering and Support Time**

# The S200 drive family has dramatically simplified tuning, a very friendly Graphical User Interface and plug and play compatibility with Kollmorgen motors.

- » The drive automatically sets the current and velocity loop parameters, greatly reducing the need for drive tuning. The benefit is out of the box "Plug-and-Play" and auto tuning set-up.
- » Windows-based Graphical User Interface models the tree format found in Explorer so learning is quick and easy.
- » Easy to debug with full fault diagnostics reduce engineering support time.
- » SynqNet option available for seamless integration into multi axis systems.
- » Indexing option for basic point-to-point and absolute moves.

#### **Other Features**


UL508C recognized, CE marked, conforms to EN50178 and EN61800-3 standards, and meets SEMI F47

# **General Specifications and Model Nomenclature**

### **Specifications**

| Drive Amplifier                               |                           |                                  | S20330  | S20630 | S20260                                 | S20360 | S20660  | S21260                                      | S22460 |
|---|---------------------------|----------------------------------|---|--------|--|--------|---|---|--------|
|   | Control Logic             |                                  | 10 - 90 VDC 85-265 VAC, 47 to 420 Hz, 1 phase |        |  |        |   |   |        |
| Input Voltage                                 | Motor B                   | us Voltage                       | 20-90 VDC                                     |        | 90-265 VAC, 47 to 420 Hz, 1 or 3 phase |        | 120-264<br>VAC, 47 to<br>420 Hz, 1 or<br>3 phase- | 120-264<br>VAC, 47 to<br>420 Hz, 3<br>phase |        |
|   | Peak Currei               | nt Time (Sec.)                   | 3   |        |  |        |   |   |        |
|   | Peak (                    | (A RMS)                          | 9   | 18     | 4.5                                    | 9      | 18  | 30  | 48     |
| Output Current                                | Continuous Cu<br>C ambier | ırrent @ 40 deg.<br>nt (A RMS)   | 3   | 6      | 1.5                                    | 3      | 6   | 12  | 24     |
|   |                           | irrent @ 30 deg.<br>nt (A RMS)   | 4.5   | 7.5    | 2.3                                    | 4.5    | 9.0   | 15  | 30     |
| Performance                                   | Current                   | Loop BW                          | 5 kHz   |        | 3 kHz                                  |        |   |   |        |
|   | Effective Car             | rier Frequency                   | 31.2  | kHz    | 20.8 kHz                               |        |   | 16 kHz                                      |        |
|   |                           | BW (Base drive<br>Net option)    | 800Hz   |        |  |        |   |   |        |
|   |                           | Loop BW<br>er Family)            | 400Hz   |        |  |        |   |   |        |
|   | Upda                      | te Rate                          | 1.25 MHz                                      |        |  |        |   |   |        |
| Analog Input Command                          |                           | 0 - +/- 10 Vdc 18-bit resolution |   |        |  |        |   |   |        |
| Nominal Shaft<br>Power at 40 deg<br>C Ambient |                           |                                  | 125W  | 250W   | 200W                                   | 500W   | 1000W   | 4000W                                       | 8000W  |
| Emulated Encoder<br>Output                    | Max Output Line Frequency |                                  | 2.5 MHz                                       |        |  |        |   |   |        |
| Feedback                                      | SFD Resolution/Rev        |                                  | 24 bits = 0.0013 arc min                      |        |  |        |   |   |        |


### S200 Servo Drive Nomenclature

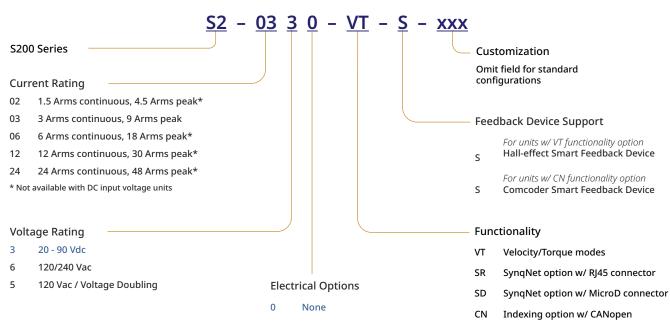

Note: Options shown in blue text are considered standard.

# **Base/Option Card Mounting Specifications**

## S200 DC Base Mounting




\* Option cards make drive width 48.3mm (1.90in)



### S200 AC Base/Option Card Mounting

|                                 | S200 Drive      |                 |                 |                |                |  |
|---------------------------------|-----------------|-----------------|-----------------|----------------|----------------|--|
|                                 | S20260-<br>xxx  | S20360-<br>xxx  | S20660-<br>xxx  | S21260-<br>xxx | S22460-<br>xxx |  |
| H<br>Height<br>in (mm)          | 6.89<br>(175)   | 6.89<br>(175)   | 6.89<br>(175)   | 6.97<br>(177)  | 7.72<br>(196)  |  |
| W<br>Width<br>in (mm)           | 2.16<br>(54.8)  | 2.16<br>(54.8)  | 2.16<br>(54.8)  | 2.99<br>(76)   | 3.94<br>(100)  |  |
| D<br>Depth<br>in (mm)           | 5.18<br>(131.6) | 5.18<br>(131.6) | 5.18<br>(131.6) | 5.98<br>(152)  | 7.48<br>(190)  |  |
| MH<br>Mounting<br>in (mm)       | 6.55<br>(166.4) | 6.55<br>(166.4) | 6.55<br>(166.4) | -              | -              |  |
| MW<br>Mounting<br>in (mm)       | 1.01<br>(25.56) | 1.01<br>(25.56) | 1.01<br>(25.56) | -              | -              |  |
| Customer<br>Cabinet<br>Depth in | 8 in            | 8 in            | 8 in            | 8 in           | 10 in          |  |
| l cont<br>Arms                  | 1.5             | 3               | 6               | 12             | 24             |  |
| l peak                          | 4.5             | 9               | 18              | 30             | 48             |  |



\* Option card does not increase width of drive.

# **Benefits and Features**

### **Reduced Overall Cost**

The S200 design requires fewer components helping to lower the overall machine cost.

- » S200 drive family and the AKM motor family linked with Kollmorgen Value Line cables - dependable quality now at a lower price.
- » All drive software is included with every S200 Drive.
- » Single supplier of AC or DC input brushless servo drives and motors and stepper drives and motors reduce vendor list management.

Setup is a simple, quick, 5 step process. Smart


### **Optimize Cabinet Space**


The Kollmorgen S200 series of drives are very compact (high power density), and take up less cabinet space than most servo drives of similar power levels.

### **User Friendly**

Simple Graphical User Interface is designed to expedite the set up process. The S200 high performance drive with the world class AKM motors auto tunes for most applications. If you wish to fine tune, the intuitive Windows® Explorer-like interface makes it very easy to do so.

An Advanced tuning option is also available.



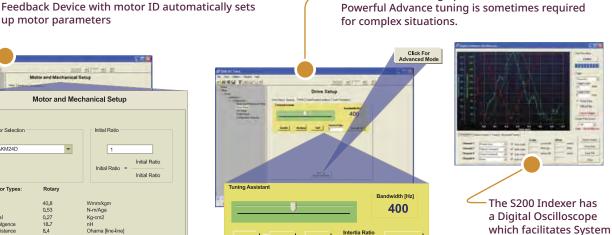

Default All

Tuning is as easy as moving a slider bar. This works for most applications.

# S200 Features

### » Functionality

- · Base Unit Torque, Velocity, Step and Direction Input
- · Indexer Velocity, Step and Direction (encoder following) Input, Programmable Indexing, and Absolute or Incremental move types. Also offers CANopen fieldbus option.

#### » Interface

- · Base Unit Analog (+/- 10V), Step and Direction, Encoder input (pulse following)
- · Indexer Step and Direction, Encoder input (pulse following)
- SyngNet SyngNet (assumes the use of a controller)
- Power All are 1.5 A rms cont. to 24 A rms cont. low power DC input, 115VAC or 230 VAC, high power 230 VAC input

- » I/O
  - · Base Unit 1 Analog in, 2 Analog out, 5 digital in, 2 digital out, encoder in and out (in for pulse following only - not for motor feedback) - All digial I/O are **Optically Isolated**

Tuning which facilitates

System Tuning, allowing settling times down to

or below 1 ms

- Indexer 2 Analog out, 10 digital in, 3 digital out, encoder in and out- All digital I/O Optically Issolated
- » Certifications All are UL, cUL, CSA, CE and RoHS
- » Feedback Supported
  - · Base Unit Hall-effect Smart Feedback Device 24 bit resolution
  - · Indexer Hall-effect Smart Feedback Device (24 bit resolution), Comcoder
  - SyngNet Hall-effect Smart Feedback Device (24 bit resolution), Comcoder, Industry Leading 1v Pk/Pk analog encoder, Digital EnDat 2.1

# Accessories

### Cables

| Cable Part Number | Cable Type       | Description   |  |  |  |
|-------------------|------------------|---|--|--|--|
| P7S2-232-9D       | Standard         | RS232 Serial communciations cable<br>D B9 to ModJack - 6 feet   |  |  |  |
| CF-DC031N-XX-X    | Performance Line | Feedback cable - Molex connector at the motor end to IEEE1394 connector at the drive end for Smart  |  |  |  |
| VF-DC0411N-XX     | Value Line       | Feedback Device (SFD) support   |  |  |  |
| CF-DA0311N-XX-X   | Performance Line | Feedback Cable - Intercontec style connector at the motor end to IEEE1394 connector at the drive end for  |  |  |  |
| VF-DA0411N-XX     | Value Line       | Smart Feedback Device (SFD) support   |  |  |  |
| CP-102ACCN-XX-X   | Performance Line |   |  |  |  |
| VP-102BECN-XX     | Value Line       | Power Cable - Molex connector at the motor end to S200 crimp pin pluggable connector at the drive end   |  |  |  |
| CP-102ACAN-XX-X   | Performance Line | Power Cable - Intercontec style connector at the motor end to S200 crimp pin pluggable connector at the   |  |  |  |
| VP-102BEAN-XX     | Value Line       | drive end   |  |  |  |
| CC-D02C02N-XX-X   | Performance Line | Hybrid Cable - Single molex connector at the motor end to IEEE1394 connector and S200 crimp pin plugga connector at the drive end for Smart Feedback Device (SFD) and power support in a single cable                 |  |  |  |
| CC-D02A02N-XX-X   | Performance Line | Hybrid Cable - Single Intercontec style connector at the motor end to IEEE1394 connector and S200 crimp p<br>pluggable connector at the drive end for Smart Feedback Device (SFD) and power support in a single cable |  |  |  |
| CP-105CCAN-XX-X   | Performance Line | Power Cable - Intercontec style connector at the motor end to S21260  |  |  |  |
| CP-105CDAN-XX-X   | Performance Line | Power Cable with Brake - Intercontec style connector at the motor end to S21260   |  |  |  |

Note: Use XX to designate cable length in whole meters and -X to order half meter increments. – Example : "CC-D01A02N-03-5"

## **Connector Kits**

| Kit Part Number   | Description  |  |  |  |
|-------------------|--|--|--|--|
| CK-S200-MF        | Motor Power and Feedback mating connectors for AC or DC units, for customers building cables                       |  |  |  |
| CK-S200-IP-DC     | I/O and input Power mating connectors for base DC drive  |  |  |  |
| CK-S200-IP-DC-TB  | I/O and input Power mating connectors for base DC drive, Terminal Block adaptor supplied for I/O connector.        |  |  |  |
| CK-S200-IP-AC     | I/O and input Power mating connectors for S20260-VTS, S20360-VTS and S20660-VTS                                    |  |  |  |
| CK-S200-IP-ACL    | S200 Connector Kit - I/O and input power mating connectors for base S21260, S22460 and S24860                      |  |  |  |
| CK-S200-IP-AC-TB  | I/O and input Power mating connectors for base AC drive, Terminal Block adaptor supplied for I/O connector.        |  |  |  |
| CK-S200-IP-ACL-TB | Connector Kit - I/O and input power mating connectors for base AC drive & terminal block adaptor for I/O connector |  |  |  |
| CK-S200-CNDN      | Index Option card and I/O mating connectors  |  |  |  |
| CK-S200-CNDN-TB   | Index Option card and I/O mating connectors, Terminal Block adaptors supplied for the I/O and feedback connector   |  |  |  |
| CK-S200-SQ        | SynqNet option card I/O, Auxiliary feedback mates  |  |  |  |
| CK-S200-SQ-TB     | SynqNet option card I/O, Auxiliary feedback terminal block adaptors  |  |  |  |
| 768-026902-01     | Terminal Block adaptor for I/O connector   |  |  |  |

# More Expertise for a More Successful Machine

Our global engineering, service and support network provides deep knowledge of all the major industries that rely on advanced motion control and automation technology. We offer world-class engineering expertise, selfservice design tools, personalized field service, and easy access to our design, application and manufacturing centers in strategic locations across the globe.

# About Kollmorgen

Kollmorgen has more than 100 years of motion experience, proven in the industry's highest-performing, most reliable motors, drives, linear actuators, gearheads, AGV control solutions and automation platforms. We deliver breakthrough solutions that are unmatched in performance, reliability and ease of use, giving machine builders an irrefutable marketplace advantage.

Kollmorgen is a brand of Altra Industrial Motion Corp. (NASDAQ: AIMC), a premier global designer and producer of a wide range of motion control and power transmission solutions. With engineered components and systems that provide the essential control of equipment speed, torque, positioning, and other functions, Altra products can be used in nearly any machine, process or application involving motion.



# **Distributors for Australia & New Zealand**



# MOTION TECHNOLOGIES PTY LIMITED

24/22-30 Northumberland Road Caringbah NSW 2229 Australia Phone: (02) 9524 4782

sales@motiontech.com.au www.motiontech.com.au

© 08/09/2023

Specifications are subject to change without notice. It is the responsibility of the product user to determine the suitability of this product for a specific application. All trademarks are the property of their respective owners

© 2020 Kollmorgen Corporation. All rights reserved

KM\_BR\_000370\_RevA\_EN