


RIGIBELT

Mechanical non-magnetic actuator



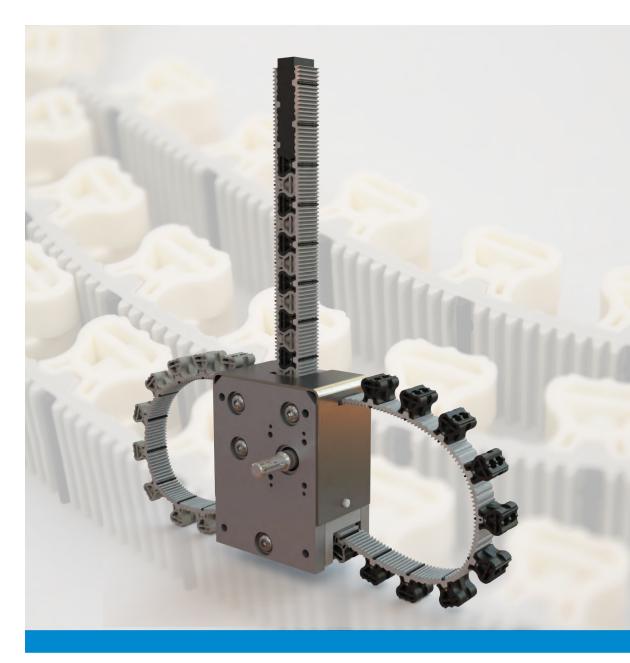

www.motiontech.com.au



LINEAR TELESCOPIC NON-MAGNETIC ACTUATOR

Horizontal and vertical transfer

The originator of Rigid Chain Technology (RCT), SERAPID has been designing and manufacturing telescopic mechanical actuators for heavy load transfer for more than 45 years.

The RigiBelt is a non-magnetic mechanical actuator. It is comprised of two flexible belts that fit together like a zipper to form a rigid push/pull column. The belts are made from reinforced plastic and therefore are totally non-magnetic. The belts lock together in a smooth movement within the drive housing. When retracted, the belts coil and store in a compact space designed to best fit the application.

The RigiBelt is suitable for the most diverse applications, from medical technology to aerospace to warehouse logistics. It is easily integrated into virtually any work environment. The standard RigiBelt actuator can be adapted specifically to your application needs.


Do not hesitate to contact us, we will help you find the optimal solution for your project.


Benefits entirely non-magnetic light weighted strong and flexible belts horizontal and vertical transfer



Interfaces

There are two standard ways to attach the links to your application- at the top or on the side of the end link:





These interfaces, as with all RigiBelt materials, are non-magnetic. Other push-pull interfaces can be designed according to your applications and needs, please consult with us for details.

Features	
stroke	from 100 mm to many meters with or without guide
max. static load of the belt	500 kg*
elongation**	3 mm / 100 kg
compression**	1 mm / 100 kg
weight of a belt	700 g/m
section of a belt	25 mm x 28 mm

- * maximum value without safety coefficient for R&D application
- ** at max. load. This information is based on static testing performed by an independent laboratory. Dynamic capacity and life cycle depend on the drive design.

Drive housing

The drive housing of the RigiBelt is compact and easy to integrate into the application environment. It also is completely non-magnetic; consisting partly of stainless steel, partly of anodised aluminum. This composition makes the system ideal for clinical environments, food processing and clean rooms.

Depending on requirements, AC or DC motors are used.

Magazine

The belts can be coiled on either side of the housing or exit in a straight line, depending on your project needs. As with all RigiBelt materials, the magazine also is completely non-magnetic.


Technical characteristics of the drive

capacity up to 1 000 N (see graph below)

speed 20 to 300 mm/s

push/pull system


no maintenance

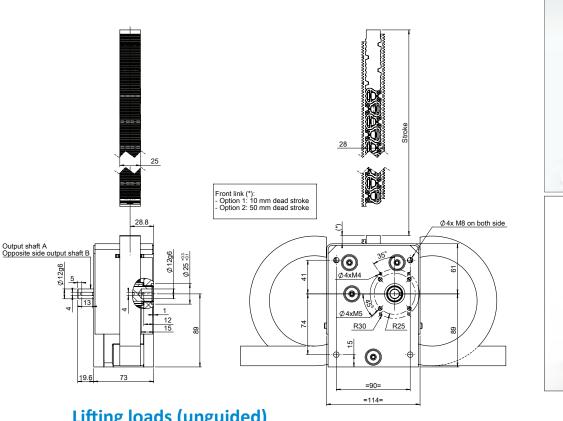





Lifting loads (unguided)

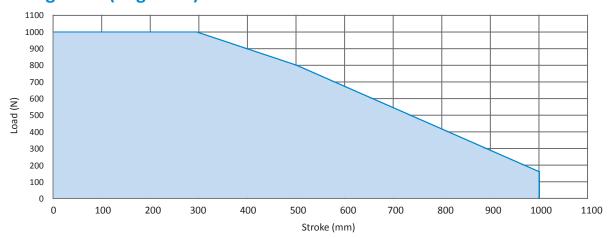



Distributors for Australia & New Zealand MOTION TECHNOLOGIES PTY LIMITED



24/22-30 Northumberland Road Caringbah NSW 2229 Australia Phone: (02) 9524 4782

sales@motiontech.com.au www.motiontech.com.au