


JTB

Ball Screw Jack

2D/3D
CAD



Descriptions	001
Materials	001 - 002
Selection Guide	003 - 011
Selection Notes	003
Unit Converter	004
Calculation Formulas	005
Sample Part Number	008
Specifications	012
Overall Dimensions	013 - 016
JTB-1T ~ JTB-2.5T	013
JTB-5T ~ JTB-10T	014
JTB-20T ~ JTB-25T	015
JTB-35T	016
Other Products	017 - 020
Contact Us	021

Contents





Descriptions

JTB Series Classic Ball Screw Jacks are born from the experience in Classic Machine Screw Jacks. They have the greater efficiency and rolling action, the ball screw jacks can operate at higher speeds or increased duty cycle when compared with the machine screw jacks. The addition of a high efficiency ball screw and nut reduces the required input torque. Required approximately two-thirds less input torque to move the load than similarly rated machine screw jacks. Due to the classic design, you don't need to attach any construction elements to the housing. They are not self-locking so a brake motor or external locking device needs to be included in the drive system and hand wheels are not a recommended option. Under normal operation, maintenance free.

Key Features

- 7 sizes in two gear ratios (high ratio, slow ratio) for high and slow linear speeds (up to 5 m/min).
- Static load capacities from 1 ton to 35 tons as Standard.
- High precision ball screw offers maximum stroke of 6m, diameter from 20 mm to 100 mm.
- Basic designs: Translating screw, Anti-rotation screw, and Rotating screw.
- Upright or Inverted mounting. Available in tension or compression loads.
- Standard with single lead ball screw, custom double or high lead ball screw which offers increased travel speed. Both of them require a brake or external locking device to hold position.
- Power source: manually by hand wheel is not recommended, electrically by brake motor driven.
- Can be applied either individually use or combined into a exactly synchronized lifting system(multiple jack systems), linked by connecting shafts, bevel gearboxes, couplings, electric motors, gear reducers, limit switches and pillow blocks etc.
- Custom double clevis ball screw jack, and trunnion mount ball screw jack.
- Can be used as alternatives to hydraulic and pneumatic systems.
- High accuracy, high efficiency, high performance, high duty cycle, low backlash, long service life, and uniform lifting speed.

Materials

We use the best materials to guarantee the performance and lifetime of the cubic ball screw jacks you purchased.

Housing

- High-strength Casting Housing, Ductile Iron.

Ball Screw

- SCM 450, S55C, Hardness: HRC 58-62.

Ball Nut

- SCM415H, Hardness: HRC 58-62.

Ball

- SUJ2, Hardness: HRC 60 UP.

Input Shaft (Worm)

- C45 Steel in high frequency heat treatment process. Custom Stainless Steel 304 or 316.

Worm Gear

- High Strength Bronze ZQA19-4 (Casting aluminum bronze) as Standard, Custom High Strength Bronze ZCuSn10PbI(Casting tin bronze)

Bearing

- Anti-friction Ball Thrust Bearings for Worm Gear. Anti-friction Ball Bearings for Input Shaft(worm). Custom Stainless Steel 304


Motor Flange Adapter

- High-strength Casting Motor Adapter, Ductile Iron. Custom Stainless Steel 304 or 316.

Lubricants

- Synthetic Grease, Extreme Pressure EP2 Lithium Grease.

Materials

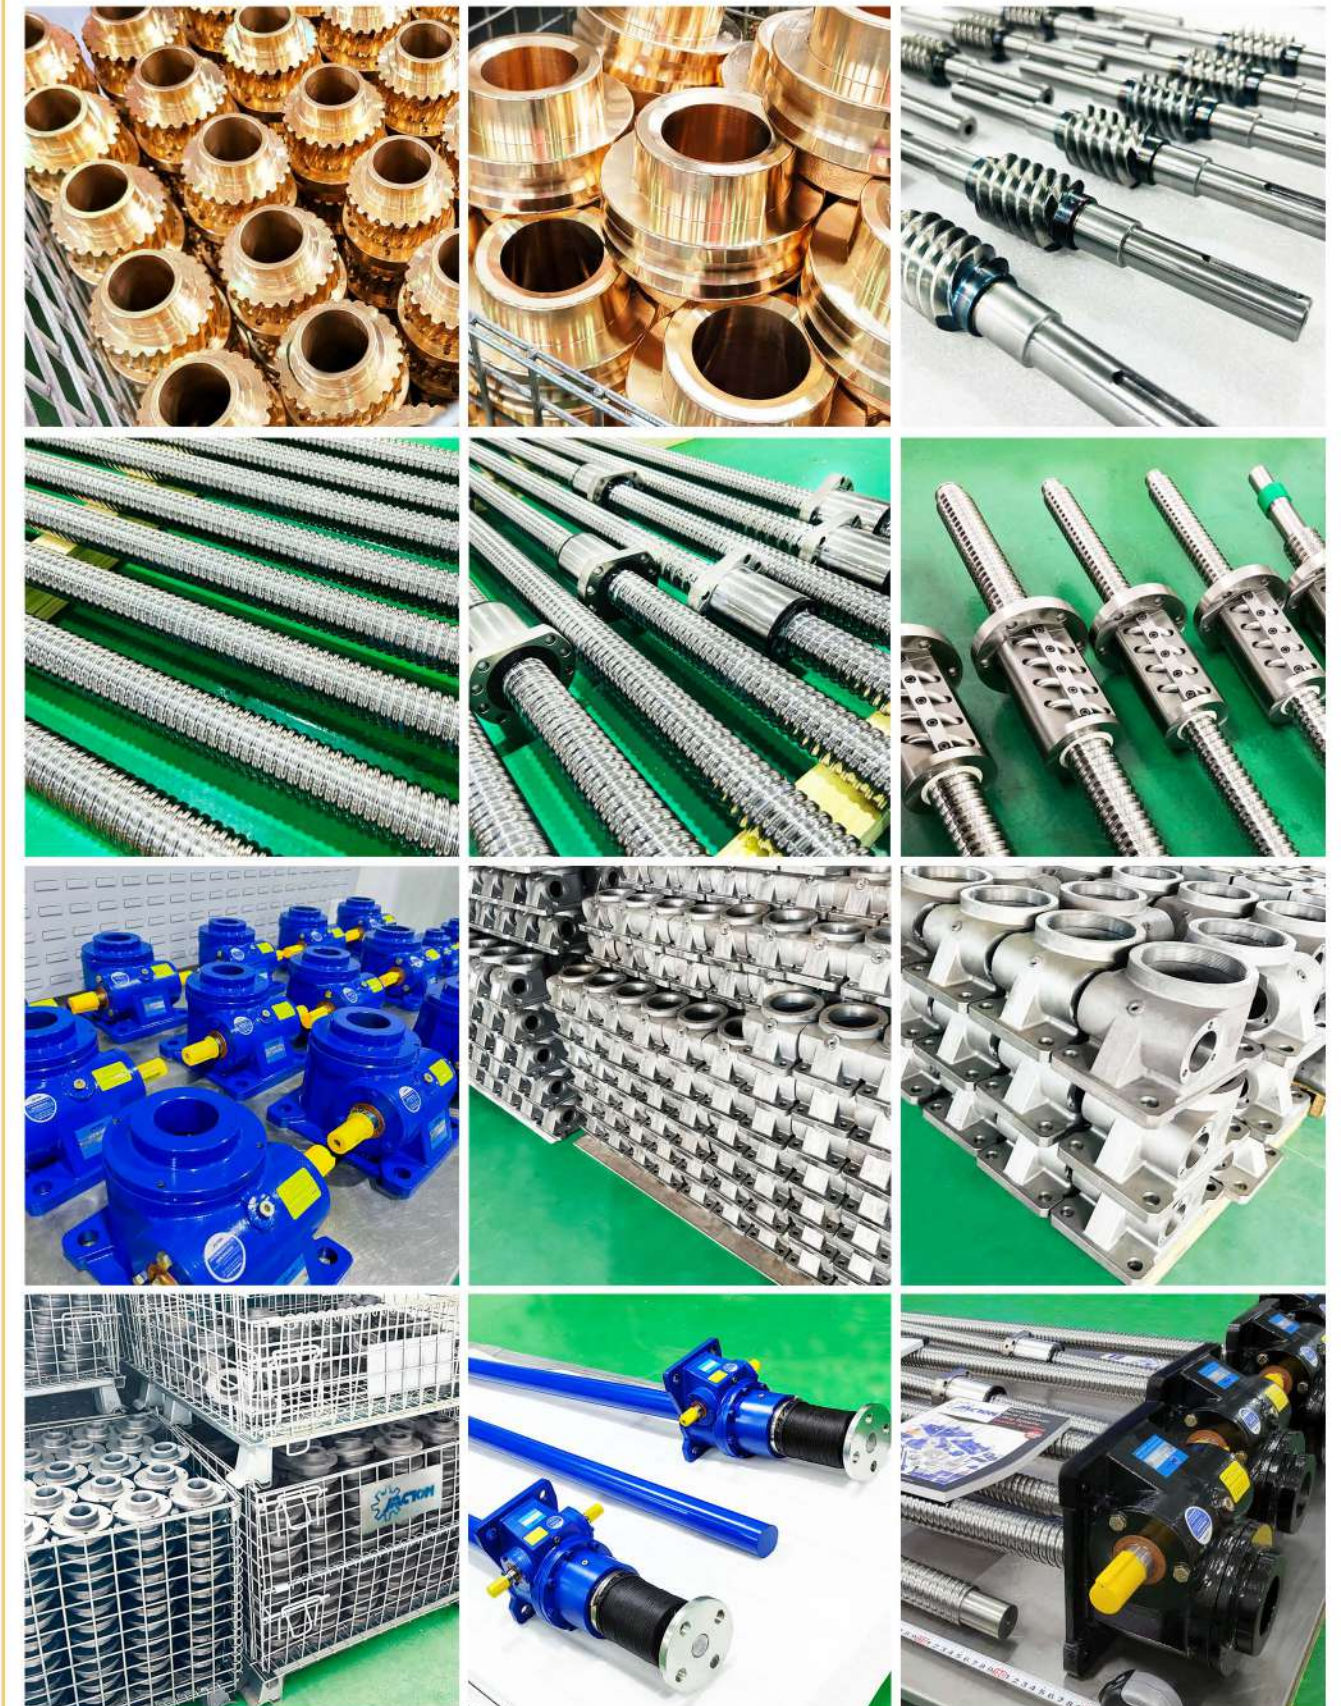



Selection Guide

Selection Notes

- (01) Screw Jacks and Lifting Systems are for industrial use only, not recommended for transporting personnel.
 - (02) Carefully consider jack ratings before making a selection. Be sure that the dynamic or static load carried or sustained by jack does not exceed its maximum capacity.
 - (03) Carefully consider the combination of screw shaft speed (rpm) and rated load. Also, take extra care in verifying rated buckling load and screw shaft speed (rpm). Exceeding the data provided in this catalog can cause major damage to the system.
 - (04) Make sure that the surface temperature of the housing does not exceed temperature of -15°C to +80°C during operation. If using a traveling nut jack, measure the traveling nut surface temperature. Make sure all the rotating parts are completely stopped before proceeding to measure.
 - (05) The maximum input speed is 1500 rpm as long as the input power does not exceed the jack's maximum allowable input power.
 - (06) Screw jack can not be operated continuously. Duty cycle based on 30 minutes.
 - **Note:** Below duty cycles are based on ambient temperatures 20°C. For ambient temperatures higher than 20 °C, the duty cycle (ED) must be reduced.
 - * Screw Jack with Trapezoidal Screw (Machine Screw Jack) duty cycle ≤ 20%ED.
 - * Screw Jack with Ball Screw (Ball Screw Jack) duty cycle ≤ 30%ED.
 - **Note:** For operation longer than that mentioned above or for any continuous operation, the jacks temperature must be monitored and should not exceed 80°C maximum in order to determine its duty cycle.
- Duty Cycle (%ED) = [1 Duty Cycle / (1 Duty Cycle + 1 Rest Cycle)] x 100%**
- (07) Be sure not to exceed the maximum input torque for multiple screw jack systems by verifying the rated input torque for each jack.
 - (08) Be sure that starting torque is 200% or more of required running torque.
 - (09) Be sure that ample driving power is available to drive the jack when using in temperatures below 0°C. Low temperatures decrease the jack's efficiency due to the increased grease viscosity inside the jack's gearbox.

Selection Guide

- (10) Although Screw Jack with **Single-start** Trapezoidal Screw (Machine Screw Jack) has self-locking feature, vibration and shock may affect its efficiency, in which case a brake motor or extra braking device is required. Screw Jack with **Double-start** Trapezoidal Screw (Machine Screw Jack) is considered not self-locking will require a brake or other holding device. Screw Jack with Ball Screw (Ball Screw Jack) can backdrive because of their extremely high efficiencies and require some means of holding the load, such as a brake motor.
- (11) When jacks are working, can not force to stop, may result in the jacks damage or injury personnel.
- (12) When Ball Screw Jacks are under loads, can not change the motor drive to manual operation. Because the loads will cause the input shaft to rotate very dangerously.
- (13) Mechanical stops (Stop Nuts) are not provided on the lifting screw unless requested. Therefore, it is possible to drive the screw out of the jack's housing
- (14) Never approach or touch the rotary parts (input shaft, etc.) or the lifting screw during operation.
- (15) Bellows Boots and Protective Tubes should be used to protect and keep the lifting screw clean in dusty or abrasive environments.

Unit Converter

- 1 ft = 304.8 mm
- 1 in = 25.4 mm
- 1 m = 10 dm = 100 cm = 1000 mm
- 1 in-lb = 0.113 Nm
- 1 Nm = 0.737 ft-lb
- 1 ft-lb = 1.356 Nm
- 1 lb = 0.454 kg
- 1 kg = 2.205 lb = 1000 g
- 1 N = 0.1 kg
- 1 t = 1000 kg = 10 kN = 2000 lb
- 1 m/min = 1000 mm/min = 16.7 mm/sec
- 1 in/sec = 25.4 mm/sec
- 1 ft/sec = 304.8 mm/sec
- 1 hp = 0.75 kW
- °C = (°F-32) / 1.8
- °F = °C x 1.8 + 32



Selection Guide

Calculation Formulas

■ **(01) Calculate Total Load Ws (N)**

$$W_s = W \times sf$$

Ws = Total Load (N)

W = Maximum Load (N)

sf = Safety Factor (Table 1.)

Table 1. Safety Factor sf

Load Conditions	Example Purposes	Safety Factor (sf)
Smooth movement with no shock, Light load	Opening and closing a valve, Adjusting a conveyor	1.0 ~ 1.3
Light shock, Medium load	Use with various kinds of transporting equipment and lifters	1.3 ~ 1.5
Severe shock and/or vibration, Heavy load	Use with large transporting carriages, Holding the position of a press roller	1.5 ~ 3.0

● **Note:** The above table is for general reference only. Consider particular operating conditions under which you operate before selecting a safety factor.

■ **(02) Calculate Load Per Jack Wn (N)**

$$W_n = W_s / (N_o \times fd \times \eta_g)$$

● **Note:** For a synchronous drive, use a synchronous drive coefficient (Table 2).

● **Note:** Don't ignore spiral bevel gearbox efficiency 94%.

W_n = Load Per Jack (N) W_s = Total Load (N)

N_o = Number of jacks fd = Multiple jacks system coefficient (Table 2.)

η_g = Bevel Gearbox efficiency = 94%

Table 2. Multiple Jacks System Coefficient fd

No. of jacks	1	2	3	4	5 ~ 8
Coefficient	1	0.95	0.9	0.85	0.8

■ **(03) Jack Selection**

Follow these steps to make a preliminary jack selection.

Points of preliminary jack selection

- Select (temporary) worm speed ratio by adjusting the screw shaft rpm. If difficult to select, inspect by H speed.
- Consider traveling space when selecting stroke.
- Select options based on your needs.

Selection Guide

■ **(04) Confirming Required Input Speed n1 (rpm)**

Determine the required input rpm, using the required screw shaft speed.

● **Note:** Input speed should not exceed 1500 rpm.

$$n1 = v \times i / TP$$

v = Lifting speed (mm/min)

n1 = Input speed of worm shaft (rpm)

TP = Screw pitch (mm)

i = Gear ratio

■ **(05) Verifying Required Input Torque per T (Nm)**

$$T = (F_{dyn} \times TP) / (2 \times \pi \times \eta \times i) + T_o$$

F_{dyn} = Dynamic axial force (= lifting force) (kN) F_{stat} = Static axial force (= retention force) (kN)

TP = Screw pitch (mm)

π = 3.1416

i = Gear ratio

η = Screw jack efficiency (see the Specifications of Jack Series).

* For Machine Screw Jacks, normal η = 0.15 (H ratio), η = 0.12 (L ratio).

* For Ball Screw Jacks, normal η = 0.3~0.35 (H ratio), η = 0.22 (L ratio).

T_o = Idling torque (Nm) (see the Specifications of Jack Series)

■ **(06) Verifying Required Input Power P (kW)**

$$P = W1 \times v1 / (6000 \times \eta)$$

P = Input power (kW)

W1 = Lifting force (kgf)

v1 = Lifting speed (m/min)

η = Screw jack efficiency (see the Specifications of Jack Series).

* For Machine Screw Jacks, normal η = 0.15 (H ratio), η = 0.12 (L ratio).

* For Ball Screw Jacks, normal η = 0.3~0.35 (H ratio), η = 0.22 (L ratio).

■ **(07) Verifying Required Input Power P (kW)**

07.01) Lifting Speed: $v = n1 \times TP / i$

07.02) Stroke / Revolution: $SR = TP / i$

07.03) Input Torque: $T = 9550 \times P / n1 + T_o$

07.04) Input Power: $P = T \times n1 / 9550$

07.05) Starting Torque per Jack: $T_{st} \approx T \times 1.3$

07.06) Hand Wheel Turning Force: $W_{hw} = T / R_{hw}$

07.07) Input Power of Multiple Jacks System: $P_s = P \times N_o / (fd \times \eta_g)$

07.08) Input Torque of Multiple Jacks System: $T_s = T \times N_o / (fd \times \eta_g)$

07.09) Screw Shaft Pitch Diameter: $d_2 = D - 0.5 \times TP$

07.10) Screw Shaft Torque: $T_{hub} = F_{dyn} \times (d_2 / 2) \times \tan(\alpha \pm \phi)$, $\phi \approx 6^\circ$



Selection Guide

Calculation Formulas

07.11) Lead Angle: $\alpha = \arctan[TP / (d_2 \times \pi)]$

- **Note:** A prerequisite is a vibration-free operation
 - * Self-locking at standstill (Static): $2.4^\circ < \alpha < 4.5^\circ$, may require brake motor.
 - * Self-locking from movement (Dynamic): $\alpha < 2.4^\circ$, don't require brake motor.
 - * No self-locking: $\alpha > 4.5^\circ$, require brake motor.

07.12) Duty cycle based on 1 hour: $ED = [S \times As \times 5 / (3 \times v)] \times 100\%$

07.13) Ball Screw Service Life in Hours: $L_h = (C_{dyn} / F_{dyn})^3 \times 10^6 / (n_2 \times 60)$, $n_2 = n_1 / i$

- **Note:** Trapezoidal Screw Service Life cannot be determined by the formula used to calculate a Ball Screw wear life. Use the information below as a reference. 50kN(5 ton) and below models average expected life 5000 meters. 100kN(10 ton) and above average expected life 1000 meters.

v = Lifting speed (mm/min)

n_1 = Input speed of worm shaft (rpm)

n_2 = Output speed of screw shaft (rpm)

TP = Screw pitch (mm)

i = Gear ratio

SR = Stroke / Revolution (mm)

N_o = Number of jacks

fd = Multiple jacks system coefficient (**Table 2.**)

η_g = Bevel Gearbox efficiency, $\eta_g \approx 94\%$

P = Input power per jack (kW)

P_s = Input power of multiple jacks system (kW)

T_o = Idling torque (Nm)

T = Input torque per jack (Nm)

T_s = Input torque of multiple jacks system (Nm)

T_{st} = Starting torque per jack (Nm)

T_{hub} = Screw Shaft Torque (Nm)

L_h = Ball screw service life in hours (h)

C_{dyn} = Dynamic load capacity of ball screw (kN)

F_{dyn} = Dynamic axial force (= lifting force) (kN)

α = Lead Angle ($^\circ$)

ϕ = Dynamic friction angle ($^\circ$)

d_2 = Pitch diameter (mm)

D = Screw shaft diameter (mm)

W_{hw} = Hand wheel turning force (N)

R_{hw} = Hand wheel radius (m)

$\pi = 3.1416$

ED = Duty Cycle (%/hr)

S = Length of Stroke (mm)

As = Number of load cycles (up and down movement).

- * **Example:** 5 times in and out movement of the screw shaft equals 10 double strokes.

Selection Guide

Sample Part Number (Example) :

JTB50 - US - 300 - H - I - C - PP
 (1) (2) (3) (4) (5) (6) (7)

(1) Models & (4) Gear Ratios

JTB-1T (BS 20x5) H=1:6 L=1:24	JTB-2.5T (BS 25x5) H=1:6 L=1:24	JTB-5T (BS40 x10) H=1:6 L=1:24	JTB-10T/15T (BS 50x10) H=1:8 L=1:24
JTB-20T (BS 63x10) H=1:8 L=1:24	JTB-25T (BS 80x10) H=1:10-2/3 L=1:32	JTB-35T (BS 100x20) H=1:10-2/3 L=1:32	H: High ratio L: Slow ratio


1.1) Model Note 1: the model indicates the maximum static load of this screw jack, but not the Maximum dynamic load. The dynamic load depends on the lifting speed, travel length and others working conditions.

1.2) Model Note 2: The slower the lifting speed, the greater the dynamic load.

1.3) Model Note 3: In the case of compressed loads and long strokes, please calculate maximum critical buckling force.

1.4) Gear Ratio Note: Every screw jack model with 2 gear ratios as a standard. Custom others gear ratios.

(2) Basic Designs and Configurations

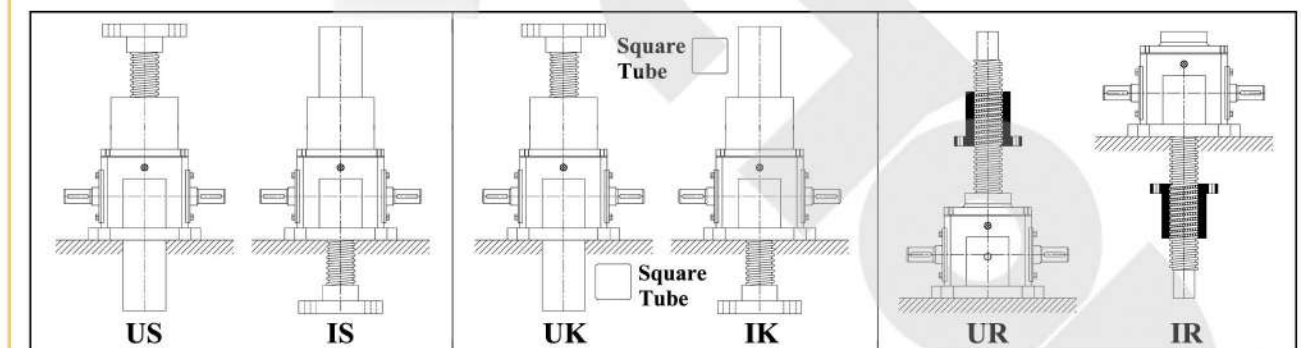

2.1) "US" and "IS" are Translating Screw Jacks, they are the most commonly specified jack. All that is required for proper function is to restrain the rotation of the lifting screw and apply torque to the input shaft. This is often achieved through the use of guides (guided load) or by attaching a common load across multiple jacks. Most applications use this jack design.



Selection Guide

Sample Part Number


2.2) "UK" and "IK" are Anti-rotation Screw Jacks, they are attached Square Guide Tube for non-rotation. A square guide tube is attached to either the top or bottom of the Screw Jack. A square nut is attached to the end of the Lifting Screw which is then fitted inside the tube, preventing rotation. The Square Guide Tube is supplied with lube fittings. It is ideal for use in applications where a single jack must extend to meet and move a load to which it is not attached (unguided). Anti-rotating jacks are mostly used on larger Jacks and where the lifting force is high in relationship to the nominal capacity or where the travel is long.

- Note: Input torque required will increase by approximately 8%.

2.3) "UR" and "IR" are Rotating Screw Jacks, they are also called travelling nut screw jack. It is important to restrain the rotation of the traveling nut by applying a significant load, or more commonly by guiding the load or attaching the load across multiple jacks. The Rotating Jacks mount flush and they are ideal for applications where the physical space does not allow the lifting screw to extend below or above the housing.

2.4) Custom double clevis screw jacks, and trunnion mount screw jacks.


(3) Stroke and (5) Screw End Fittings

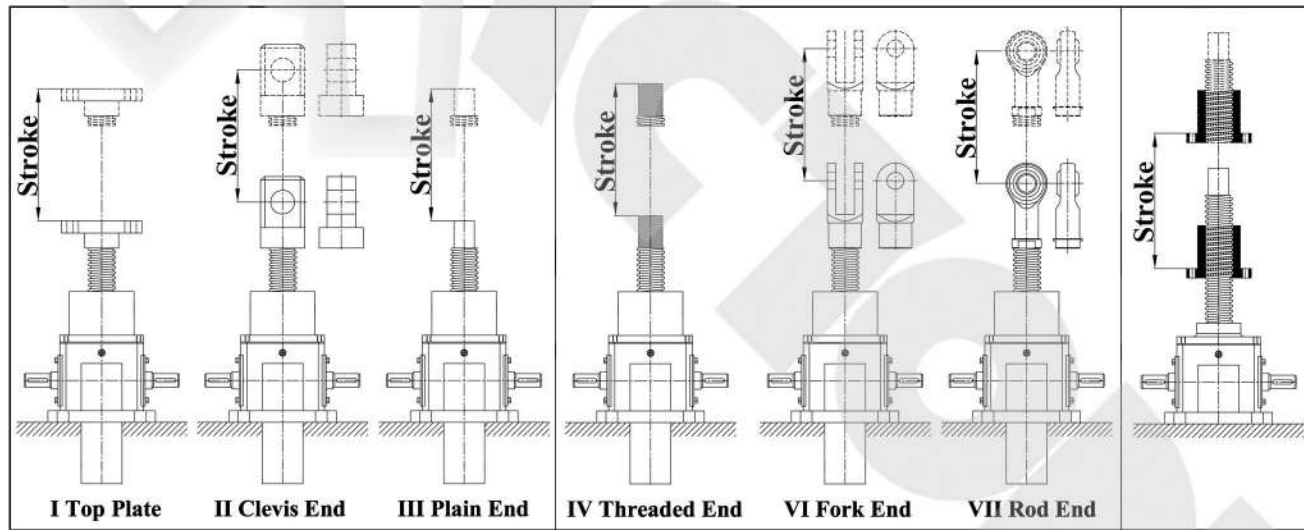

- Stroke is travel expressed in millimeter(mm) or inches and not the actual screw length.
- Standard Lifting Screw End Fittings: Top Plate (I), Clevis End (II), Plain End (III), Threaded End (IV), Forked End (VI) and Rod End (VII). Custom End Fittings are acceptable.

Selection Guide

(6) Input Shafts Codes and Motor Flange Adapters Codes (Top View)

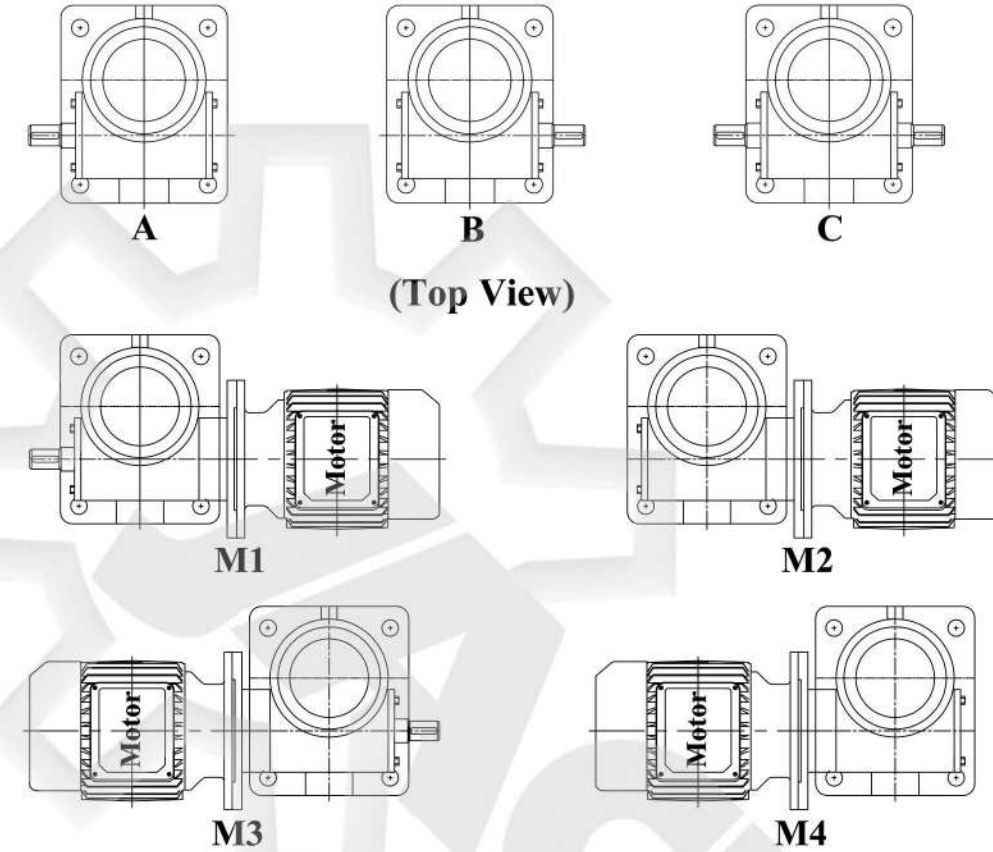

- 6.1) A: Single Input, Left Side Shaft.
- 6.2) B: Single Input, Right Side Shaft.
- 6.3) C: Double Input Shafts
- 6.4) M1: Left Side Shaft, Right Side Motor Flange Adapter (Motor Mounts).
- 6.5) M2: Right Side Motor Flange Adapter (Motor Mounts).
- 6.6) M3: Right Side Shaft, Left Side Motor Flange Adapter (Motor Mounts).
- 6.7) M4: Left Side Motor Flange Adapter (Motor Mounts).

- Note: Screw Jacks with IEC Motor Flange Adapter as a standard. Custom NEMA Motor Flange Adapter(Stepper Motor), Servo Motor Flange Adapter and Other Non-standard Motor Flange Adapters.



Selection Guide

Sample Part Number

(7) Accessories



Specifications

Remarks:




- 1) H: high ratio, L: low ratio
- 2) Max. allowable power is under the conditions that ambient temperature 20 degree C, duty cycle 20%h and input speed 1500rpm.
- 3) Overall efficiency is under grease lubrication.
- 4) Without self-locking, locking mechanisms or brake motors are required.

Model	JTB-1T	JTB-2.5T	JTB-5T	JTB-10T	JTB-20T	JTB-25T	JTB-35T
Maximum load capacity (Ton)	1	2.5	5	10	20	25	35
Ball screw diameter x lead (mm)	20 x 5	25 x 5	40 x 10	50 x 10	63 x 10	80 x 10	100 x 20
Gear ratio	H	6:1	6:1	6:1	8:1	8:1	10-2/3:1
	L	24:1	24:1	24:1	24:1	24:1	32:1
Lift screw travel (mm), per turn of input shaft	H	0.83	0.83	1.67	1.25	1.25	0.94
	L	0.21	0.21	0.42	0.42	0.42	0.32
Overall Efficiency %	H	56	55	56	55	56	51
	L	30	30	34	38	36	30
Maximum permissible power (kW)	H	0.54	1.3	2.2	3.6	5.5	8.9
	L	0.27	0.63	1.0	1.9	2.8	4.1
Idling torque (Nm)		0.29	0.62	1.37	1.96	3.92	9.81
Holding torque (Nm)	H	1.27	4.31	10.8	19.6	51.0	68.6
	L	0.26	0.91	2.4	5.8	15.0	19.5
Permissible input torque (Nm)		19.6	49	153.9	292	292	735
Required torque of input shaft at maximum load (Nm)	H	2.8	9.0	21.5	39.1	104.5	169.6
	L	1.4	4.3	9.6	20.4	54.2	98.5
Permissible maximum speed (RPM) of lift screw at maximum load	H	1500	1400	1000	890	500	400
	L	1500	1400	1000	890	500	400
Lift screw rotational torque (Nm) at maximum load		8.7	34.7	86.7	208.2	555.1	1040.9






Overall Dimensions

JTB-1T

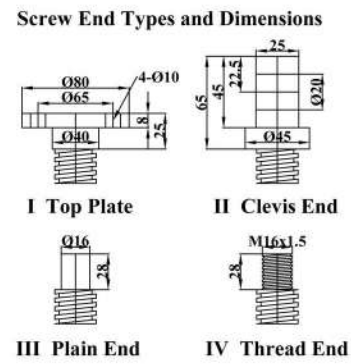
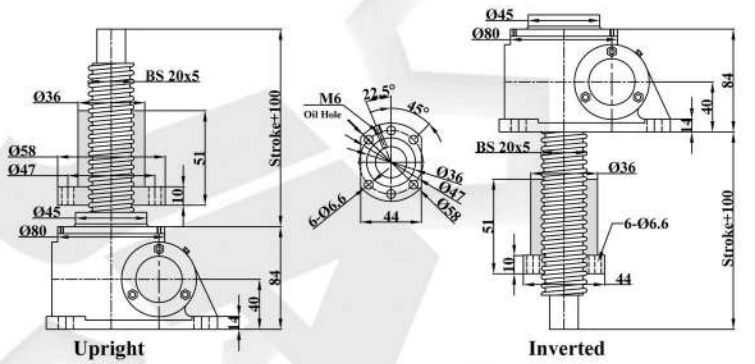
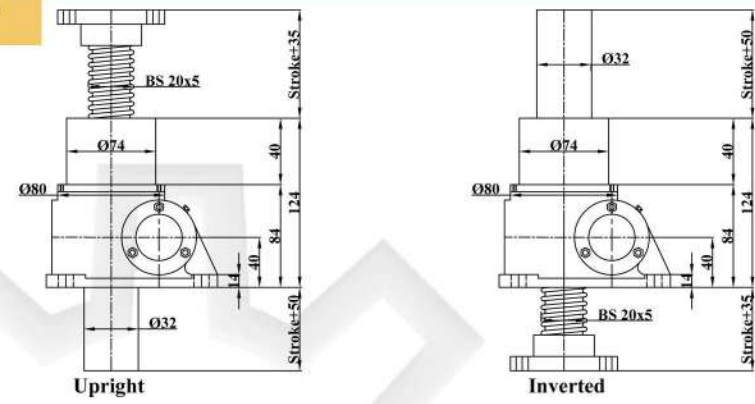


Overall Dimensions




JTB-5T

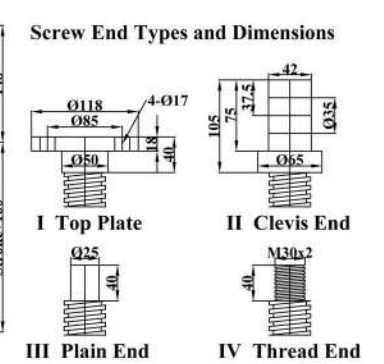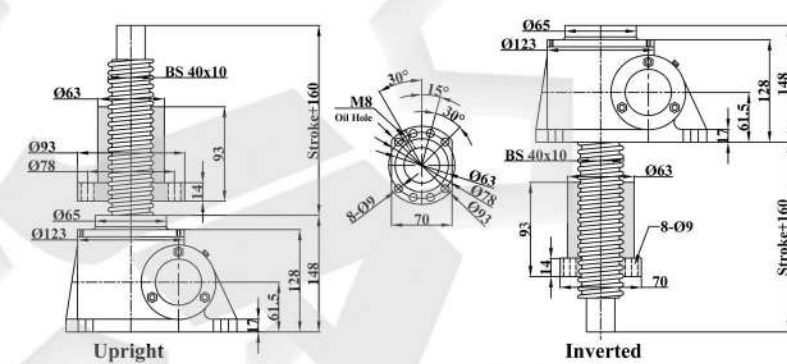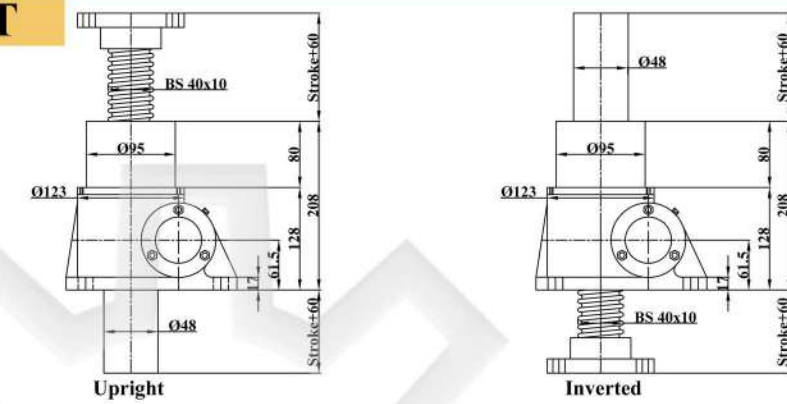

JTB-2.5T

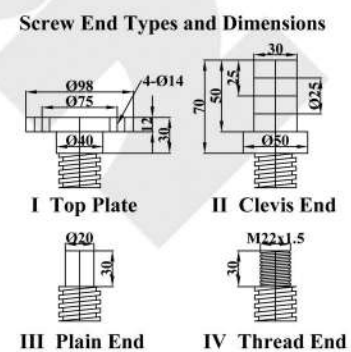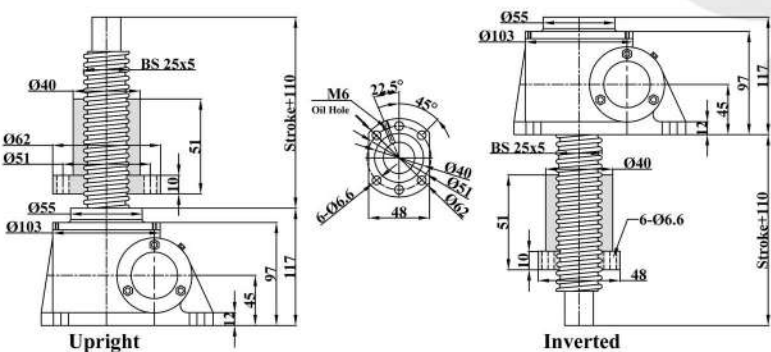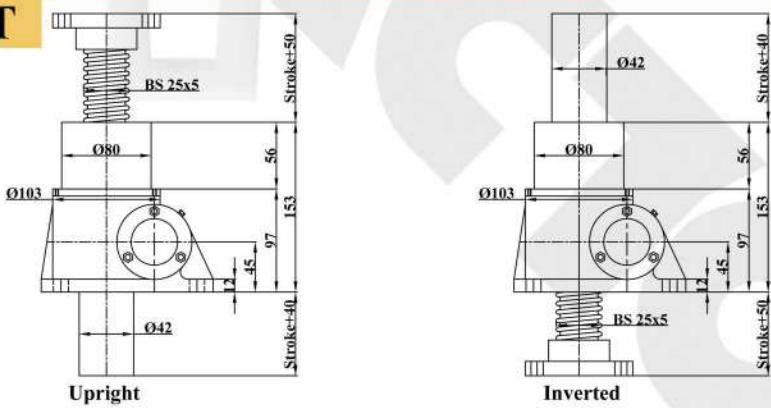

JTB-10T
JTB-15T

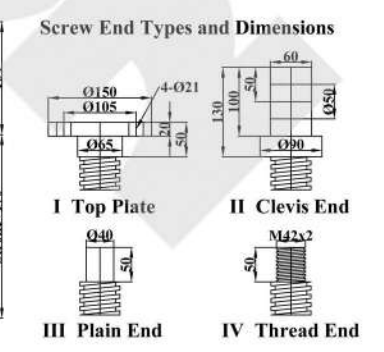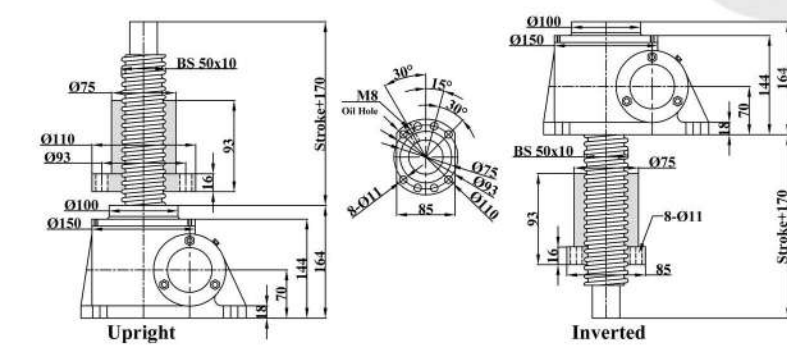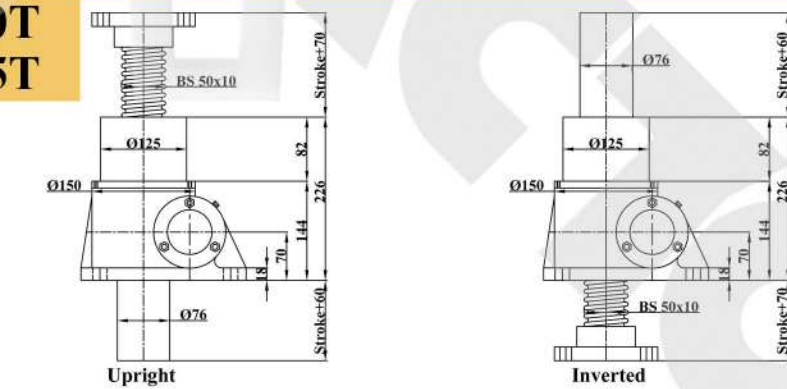


*. Dimensions are subject to change without notice

*. Dimensions are subject to change without notice




Overall Dimensions

JTB-20T

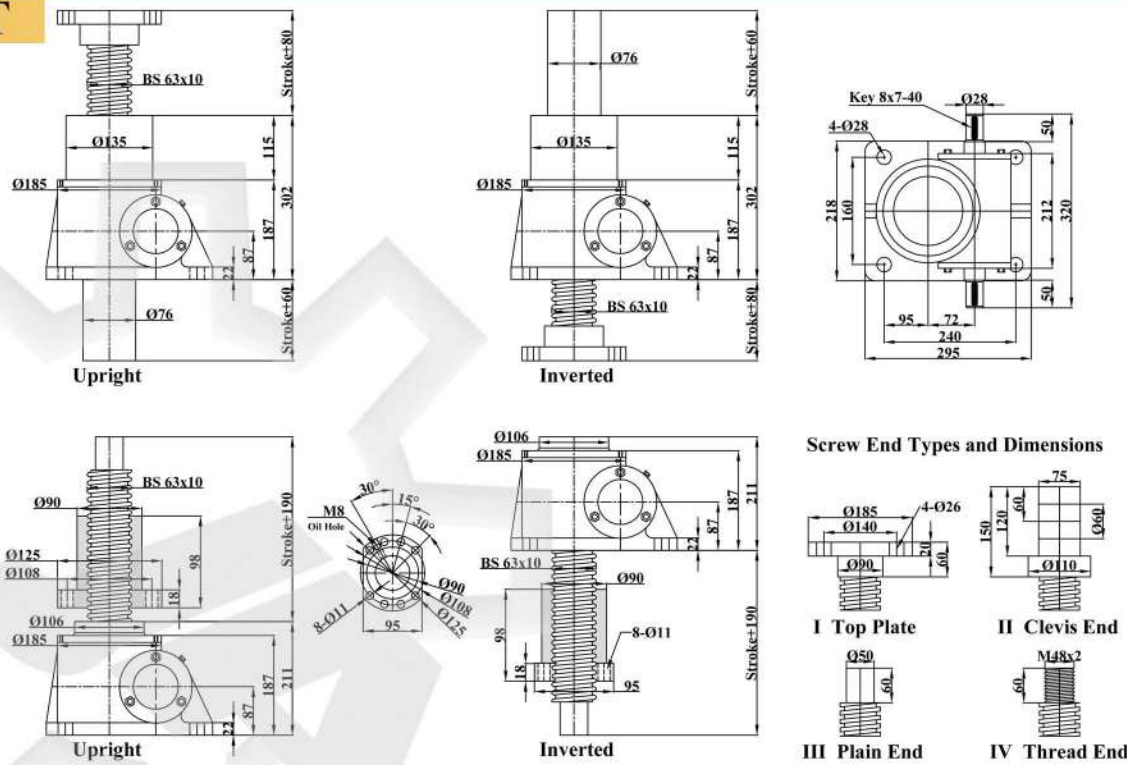


JTB-25T

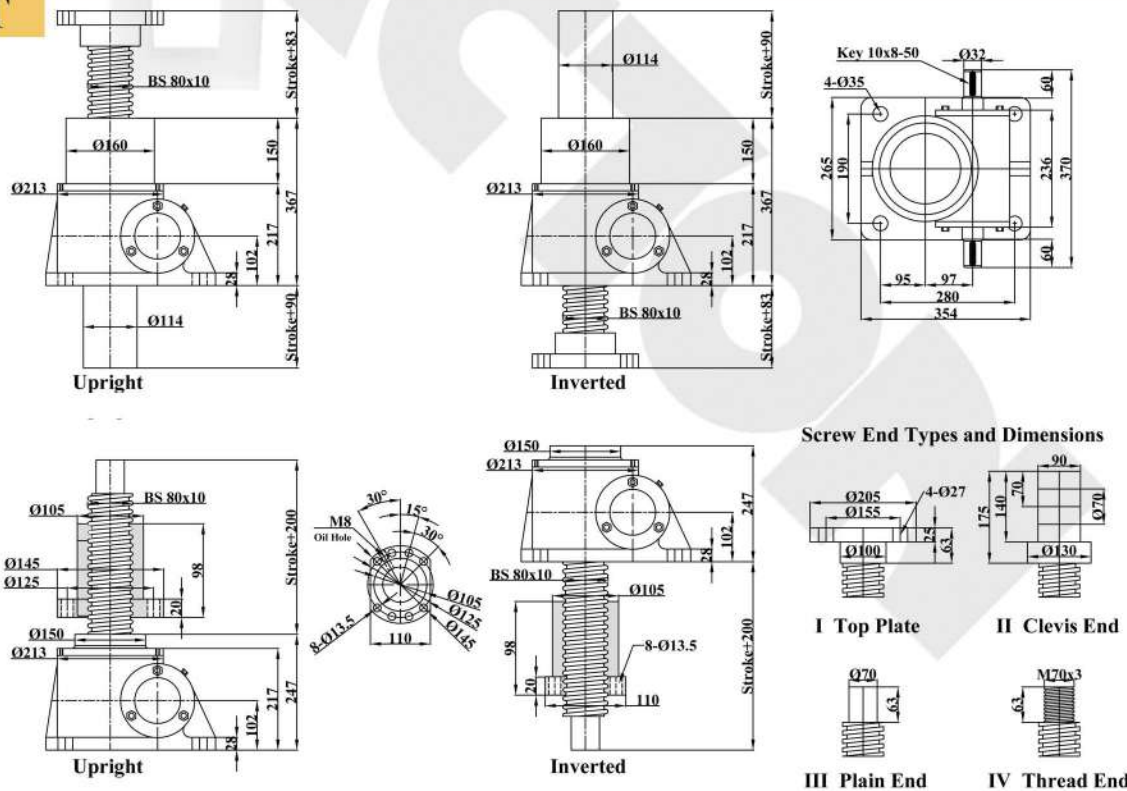

*. Dimensions are subject to change without notice

Overall Dimensions

JTB-35T

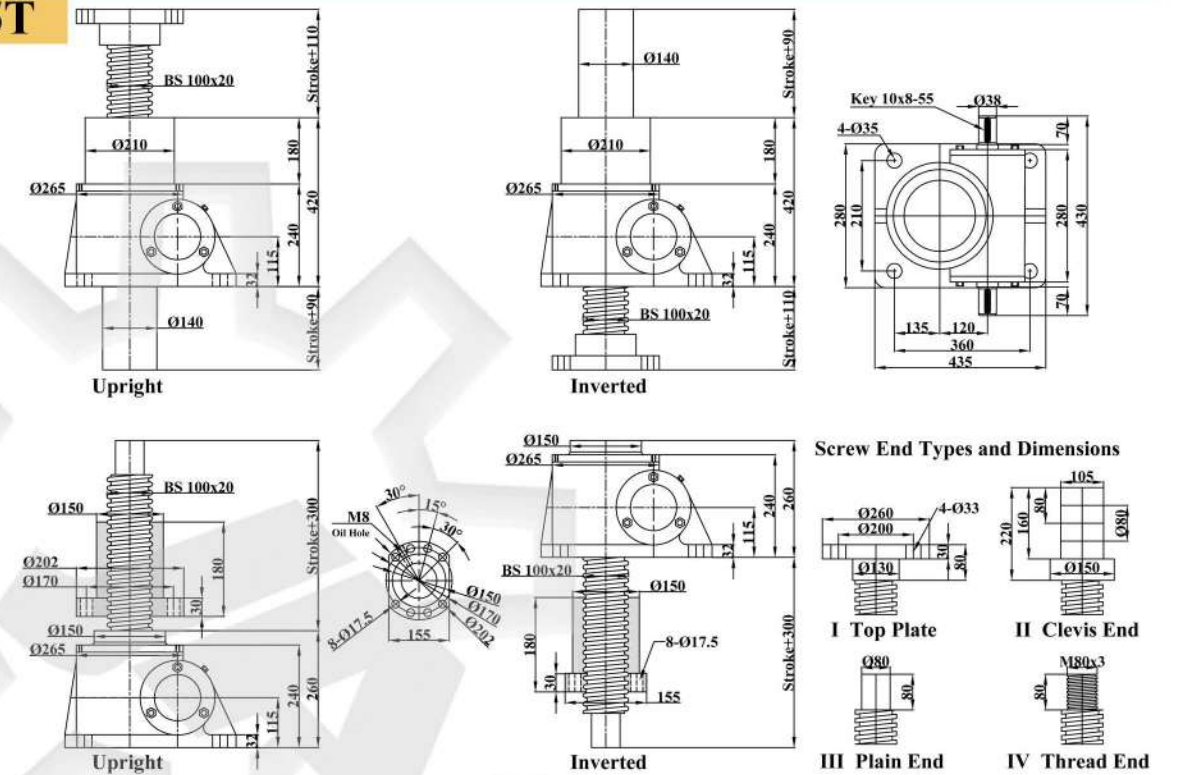

*. Dimensions are subject to change without notice



Other Products

Cubic Machine Screw Jack

- Cubic design permits any mounting position.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 2.5 kN to 500 kN as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangement



Cubic Ball Screw Jack

- Cubic design permits any mounting position.
- High duty cycle, high precision, high speed, less power and long service life.
- Static load capacities from 10 kN to 350 kN as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation.
- Single jack, or synchronization of multiple jacks arrangements.



Classic Machine Screw Jack

- Classic design, no need to attach any construction elements to the housing.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 0.5 ton to 100 tons as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangements.



Stainless Steel Screw Jack

- Classic design, no need to attach any construction elements to
- Complete Stainless Steel Screw Jack design.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 1 ton to 20 tons as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking Stainless Steel trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangements.



Other Products

Classic Ball Screw Jack

- Classic design, no need to attach any construction elements to the housing.
- High duty cycle, high precision, high speed, less power and long service life.
- Static load capacities from 1 ton to 35 tons as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation
- Single jack, or synchronization of multiple jacks arrangements.



Bevel Gear Machine Screw Jack

- High efficiency, high lifting speed, high duty cycle, long lifespan.
- Spiral bevel gear mechanism are used, with 2:1, 2.5:1 and 3:1 ratios.
- Static load capacities from 400 Kg to 3500 Kg as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 6000 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangement




Bevel Gear Ball Screw Jack

- Higher efficiency, higher lifting speed, higher duty cycle, longer lifespan.
- Spiral bevel gear mechanism are used, with 2:1, 2.5:1 and 3:1 ratios.
- Static load capacities from 400 Kg to 3500 Kg as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation.
- Single jack, or synchronization of multiple jacks arrangements.



Screw Jack Lifting Systems

- Lifting systems are not limited to the number of screw jacks. Commonly used are 2, 4, 6, 8 jack systems.
- Full synchronization, self-locking, precision positioning, easy installation and operation, maintenance free.
- From a few kilograms to heavy-duty several hundred tons.
- Complete lifting systems with geared motors, shafting and couplings available.
- Power source: Synchronized drive from a single electric motor.
- With Inverter driven motor, soft start and stop, variable lifting speeds are all available.

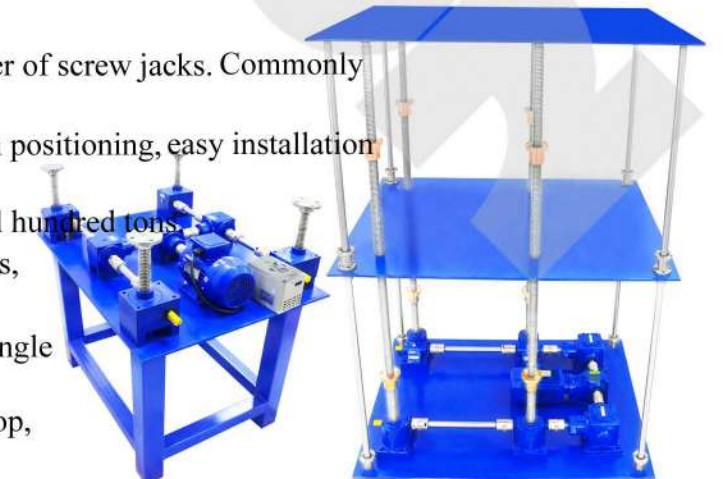



Other Products

Cubic Bevel Gearbox

- Modular design spiral bevel gearboxes with cubic housing.
- Ultra Compact Design. All-round tapped holes for universal mounting, 6 possible mounting positions.
- Gear ratios of 1:1, 2:1, 3:1, 4:1 and 5:1 are actual ones.
- Power Ratings up to 156 kW. Torque Ratings up to 1199 N.m.
- Gear transmission average efficiency up to 94%.
- 2-way, 3-way and 4-way Configurations.
- Solid Shaft, Hollow Shaft, and Direct motor mount or via motor flanges.
- High efficiency, high transmission capacity, low backlash, Noiseless operation, low running temperature and long service life.



Classic Bevel Gearbox

- Used in pairs case hardened alloy steel spiral bevel gears.
- Gear ratios of 1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1 and 5:1 are actual ones.
- Power Ratings up to 335 kW. Torque Ratings up to 5713 N.m.
- Gear transmission average efficiency up to 94%.
- 2-way, 3-way and 4-way Configurations.
- Solid Shaft, Hollow Shaft, and Direct motor mount or via motor flanges.
- Various Shafts Arrangements, Rotation Directions and Mounting Positions available.
- High efficiency, high transmission capacity, low backlash, noiseless operation, low running temperature and long service life.



Lightweight Bevel Gearbox (Aluminium Alloy)

- Quality finished casing by die-casting, in lightweight aluminium alloy.
- Compact design, small-sized, ultra-lightweight, universal mounting.
- Utilizing carburized case-hardened spiral bevel gears
- Gear ratios of 1:1 and 2:1 are actual ones.
- Power Ratings up to 4.94 kW. Torque Ratings up to 40 N.m.
- Gear transmission average efficiency up to 94%
- 2-way and 3-way Configurations.
- High efficiency, low backlash, quiet operation, maintenance free, low running temperature and long service life.



Other Products

Electric Cylinders

- Be basically screw jacks with travelling nut, but with lifting cylinder design.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 2.5 ton to 10 tons as Standard.
- Self-locking, precise positioning, and uniform speed.
- Power source: Manual operation, Motor drive.
- Single unit, or synchronization of multiple units.
- A better choice over hydraulic actuators or pneumatic cylinders with this clean alternative, simpler to install, control, low maintenance and a quieter solution.



Electric Linear Actuators

- Parallel or In-Line drive configurations.
- Self-locking ACME screw and nut, driven by an electric motor, through a reduction gearbox.
- Low maintenance due to high-quality grease and enclosed design.
- Load capacities from 100 Kgf to 15 tons as Standard (Parallel)
- Load capacities from 10 Kgf to 1000 Kgf as Standard (In-Line).
- Low noise system, higher dynamic capacity, higher speed capability and longer life.
- Low power consumption and running costs, no oil leaks, contamination or fire risk.
- Easy installation with two trunnion mounting feet, no pipework, powerpack and valves.
- Be a real alternative to pneumatic and hydraulic cylinders.



Customized and molded products

