


# JTQB

## Quick Lifting Screw Jacks [ Ball Screw ]

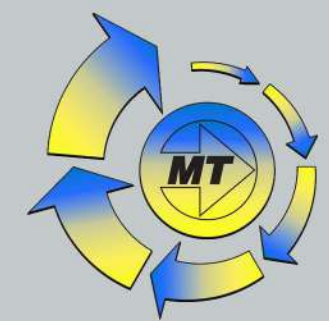

<b>Descriptions</b>	<b>001</b>
<b>Selection Guide</b>	<b>001 - 003</b>
Sample Part Number	001
<b>Specifications</b>	<b>004</b>
<b>Overall Dimensions</b>	<b>005 - 009</b>
JTQB1	005
JTQB3	006
JTQB5	007
JTQB10	008
JTQB15	009
<b>Other Products</b>	<b>011 - 014</b>
<b>Contact Us</b>	<b>015</b>

Contents





**Descriptions**

**JTQB Series Quick Lifting Screw Jacks** incorporate the use of a quality **Ball Screw** (also known as High Speed Screw Jacks, Bevel Gear Ball Screw Jacks, or Bevel Gear Lifting Jacks) are a supplement to our range of Worm Gear Ball Screw Jacks. These jacks do not use worm gearing but bevel gearing. All quick-lifting screw jacks are equipped with hardened, sharpened and spiral-toothed bevel gearbox ensures higher efficiency, higher lifting speed, greater duty cycle and a longer service life. The “JTQB” Jacks are modular design in 5 sizes. Each size is available with gear ratios 1:1 and 2:1. Gear housings are cubic design housing, compact and robust, they are made of aluminum alloy with anodizing. Compared with cast iron gearbox, it is lighter in weight, higher in strength, and easier to dissipate heat. For heavy duty model JTQB15, the gear housing is manufactured from ductile iron.

Compared with Worm Gear Ball Screw Jacks, the “JTQB” Jacks are more efficient and used in applications requiring higher dynamics and higher duty cycle up to 60%. They can be driven directly by electric motor or other engines. The highest input speed is 800rpm. Especially suitable for high-frequency and high-speed working conditions, the maximum lifting speed is up to 266 mm/s (16 m/min). There are no “standard” travel lengths (stroke), all orders manufactured according to the user’s requirements. They are not self-locking and must be equipped with a brake device or a brake motor to hold the position.

All “JTQB” Jacks are functional in every installation position and can be mounted flexibly thanks to the cubic form. According to the customer’s request, they are delivered with one shaft, two shafts, three shafts, and four shafts configurations. Custom-built to meet your specifications, they can be seamlessly configured into arrangements comprising multiple jacks. As an added benefit, “JTQB” bevel gear jacks also act as 90 degree boxes, do not therefore require additional bevel gearboxes, making them an ideal choice for the multi-jack systems. Simple and effective solution in comparison with hydraulic and pneumatic systems.

**Selection Guide**


**Sample Part Number ( Example ) :**

**JTQB5 - US - 300 - 2 - 1 - 2SR - RHCU - PP**  
 (1) (2) (3) (4) (5) (6) (7) (8)

**(1) Models & (4) Gear Ratios**


JTQB1 (16x5)	JTQB3 (20x5)	JTQB5 (25x5)	JTQB10 (32x5)	JTQB15 (40x5)
JTQB1 (16x10)	JTQB3 (20x10)	JTQB5 (25x10)	JTQB10 (32x10)	JTQB15 (40x10)
JTQB1 (16x16)	JTQB3 (20x20)	JTQB5 (25x25)	JTQB10 (32x20)	JTQB15 (40x20)
			JTQB10 (32x32)	JTQB15 (40x40)
<b>1:1, 2:1</b>	<b>1:1, 2:1</b>	<b>1:1, 2:1</b>	<b>1:1, 2:1</b>	<b>1:1, 2:1</b>

**(2) Designs and Configurations**

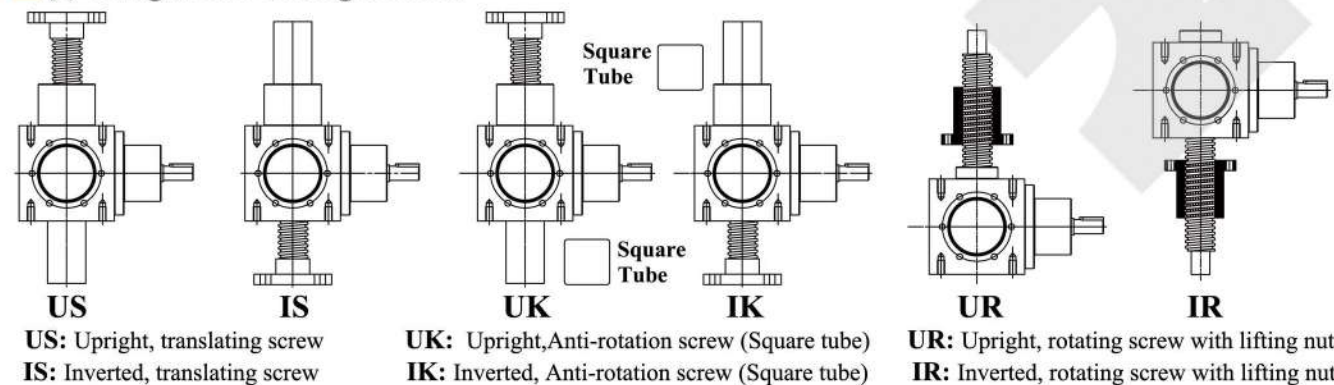


**Selection Guide**

**(3) Stroke and (5) Screw Ends**

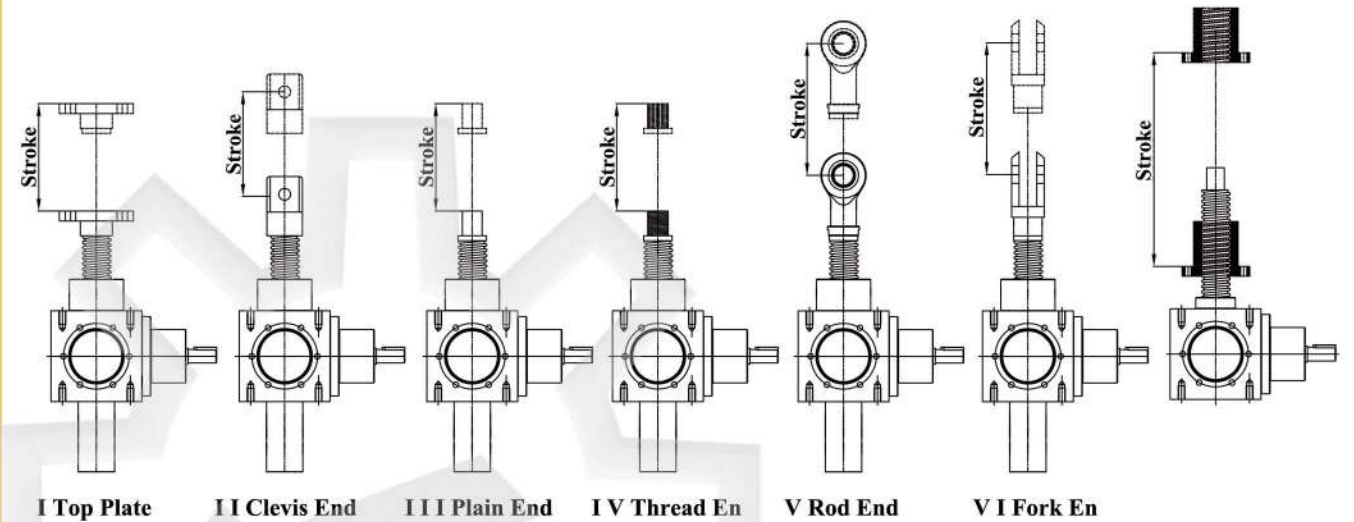


**(6) Input Shafts Types**

**Note:** The gearbox space is limit, except 1S and 2SI type, other types are not suitable for 1:1 ratio, but 2:1 ratio is available for all types.

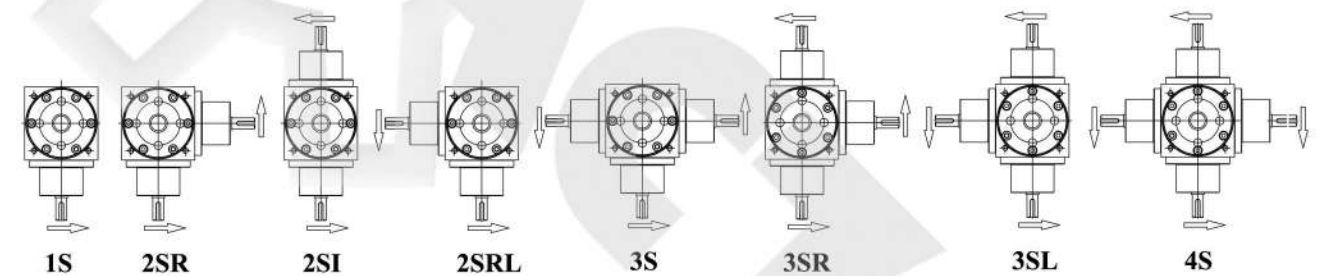

**(7) Ball Screw or Ball Nut Direction of Movement**

**RHCU:** Right-handed Screw. When the input shaft rotates clockwise, the ball screw or ball nut moves up  
**LHCD:** Left-handed Screw. When the input shaft rotates clockwise, the ball screw or ball nut moves down  
**Note:** When the input shaft rotate counterclockwise, the direction of movement is the opposite

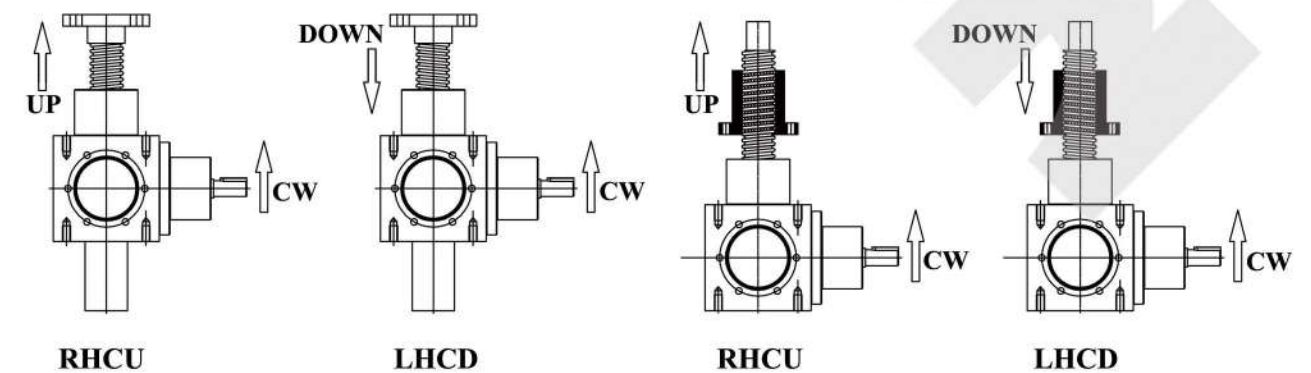



**Selection Guide**

**Sample Part Number**

**(8) Accessories**



**Specifications**


• **Note:** For multiple "JTQB" screw jack system, some bevel gear jacks require **Left-handed Ball Screw**. However, there are not high leads sizes for **Left-handed Ball Screws**. Please pay more attention when selection.

Model	JTQB1	JTQB3	JTQB5	JTQB10	JTQB15		
Rated dynamic load (kN)	1	3	5	10	15		
					<b>Translating</b>	<b>Rotating</b>	
Ball Screw Diameter x Lead (mm)	Ø16 x 5	Ø20 x 5	Ø25 x 5	Ø32 x 5	Ø32 x 5	Ø40 x 5	
	Ø16 x 10	Ø20 x 10	Ø25 x 10	Ø32 x 10	Ø32 x 10	Ø40 x 10	
	Ø16 x 16	Ø20 x 20	Ø25 x 25	Ø32 x 20	Ø32 x 20	Ø40 x 20	
			Ø32 x 32	Ø32 x 32	Ø40 x 40		
Gear ratio	H	1:1	1:1	1:1	1:1	1:1	
	L	2:1	2:1	2:1	2:1	2:1	
Lift screw travel (mm), per turn of input shaft	H	5	5	5	5	5	
		10	10	10	10	10	
		16	20	25	20	20	
	L				32	32	40
		2.5	2.5	2.5	2.5	2.5	2.5
		5	5	5	5	5	5
	8	10	12.5	10	10	10	
				16	16	20	
Overall Efficiency %	75	75	75	75	75	75	
Starting Efficiency %	50	50	50	50	50	50	
Max. permissible input power (kw)	0.55	1.1	1.5	3	4	4	
Max. permissible input speed (rpm)	800	800	800	800	800	800	
Permissible Input Torque ( Nm )	15	30	49	140	200	200	
No-Load Torque ( Nm )	0.5	0.8	1	1.4	2	2	
Duty Cycles	60%	60%	60%	60%	60%	60%	
Housing(Gearbox) Material	Aluminum Alloy				Ductile Iron		




Overall Dimensions

JTQB1

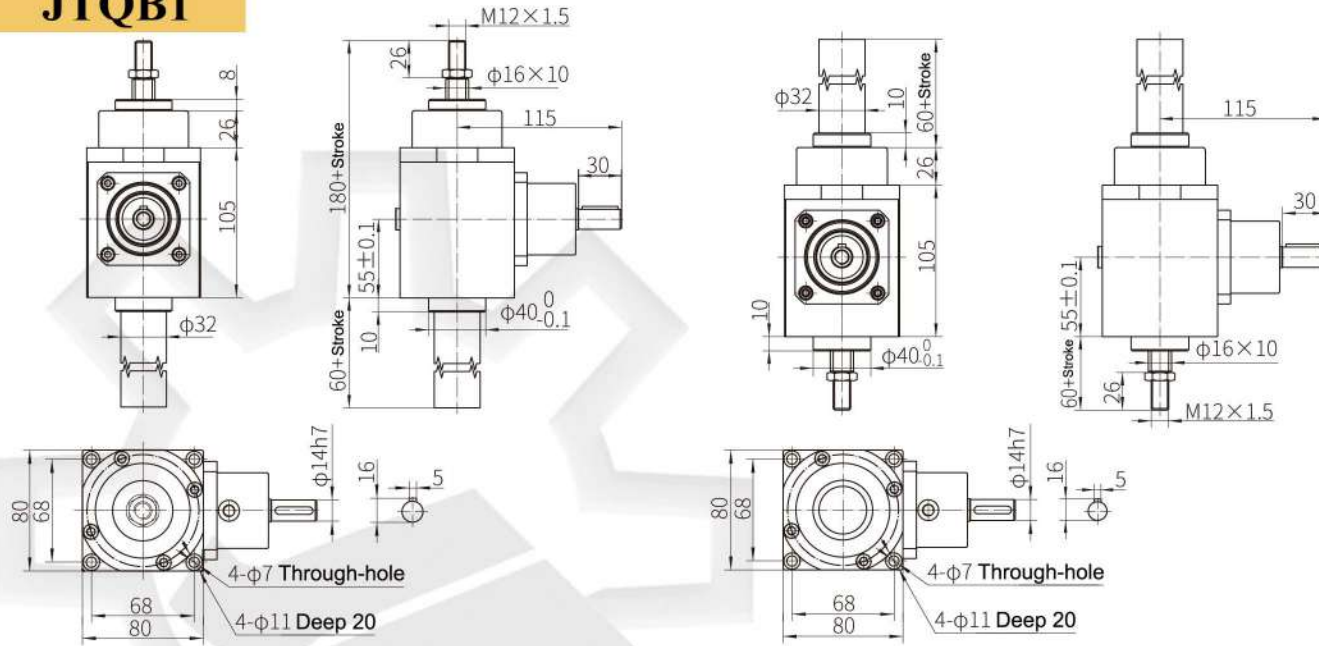


US: Upright - Translating

IS: Inverted - Translating

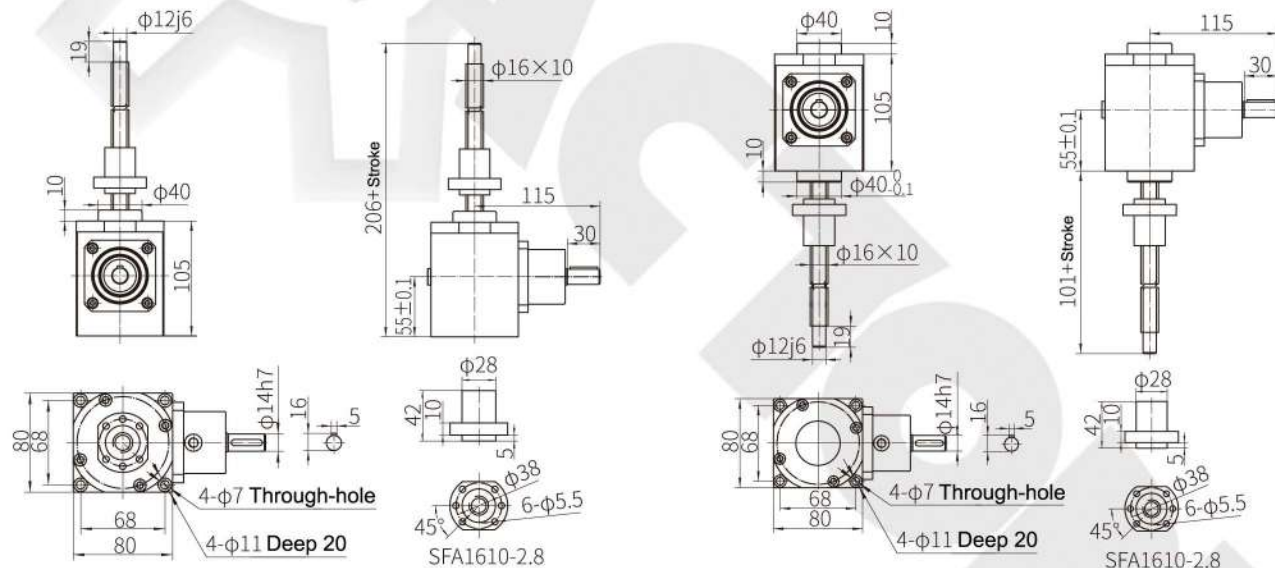

UR: Upright - Rotating


IR: Inverted - Rotating

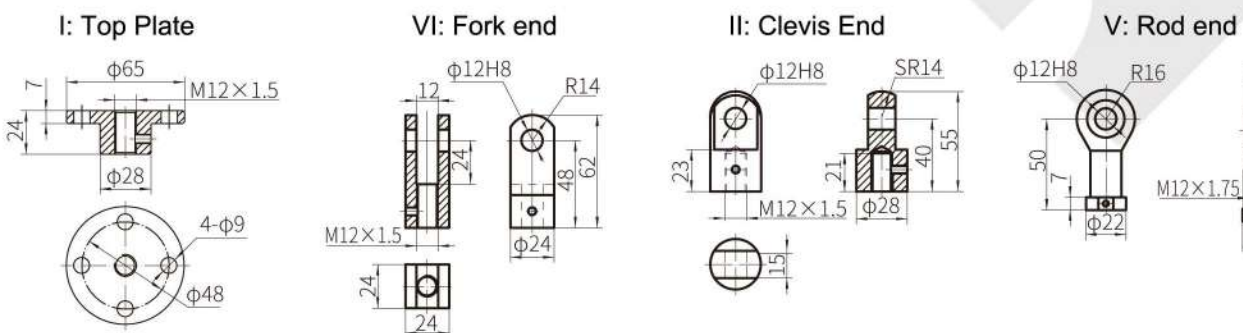

\*. Dimensions are subject to change without notice


Overall Dimensions

JTQB3

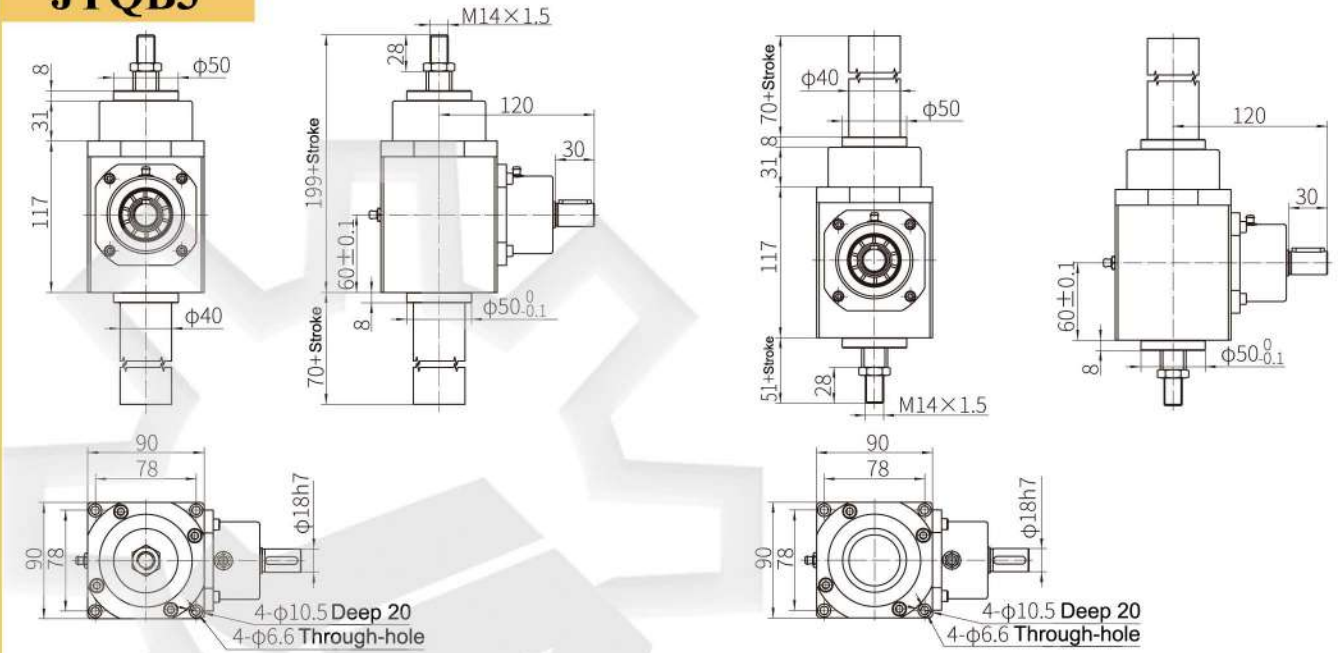


US: Upright - Translating

IS: Inverted - Translating

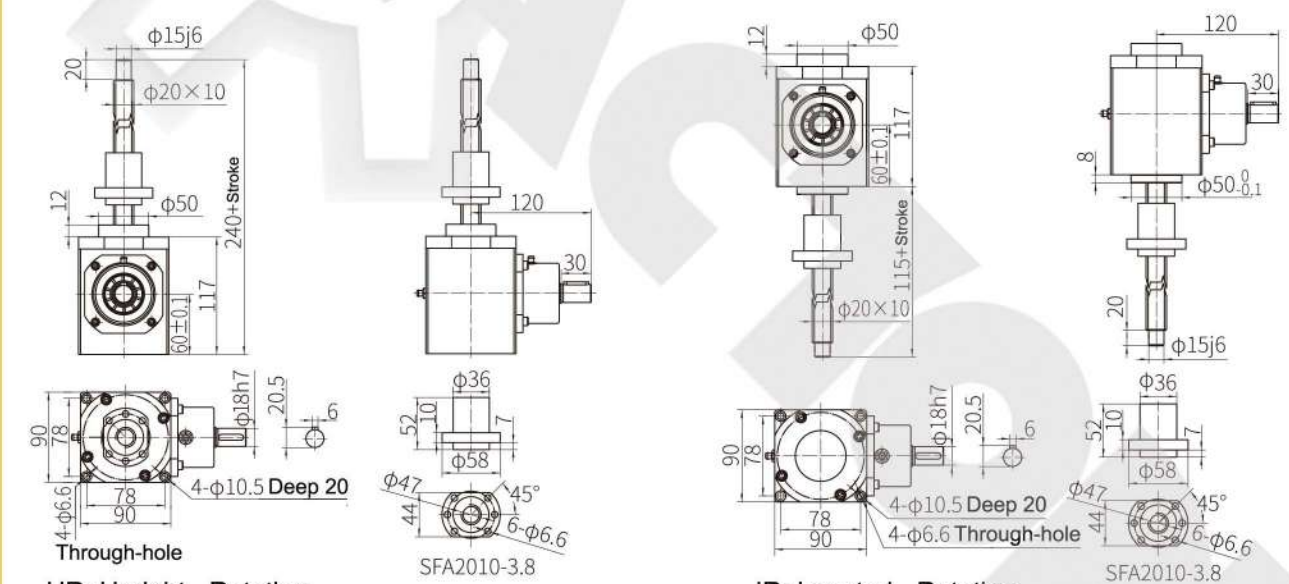

UR: Upright - Rotating

IR: Inverted - Rotating

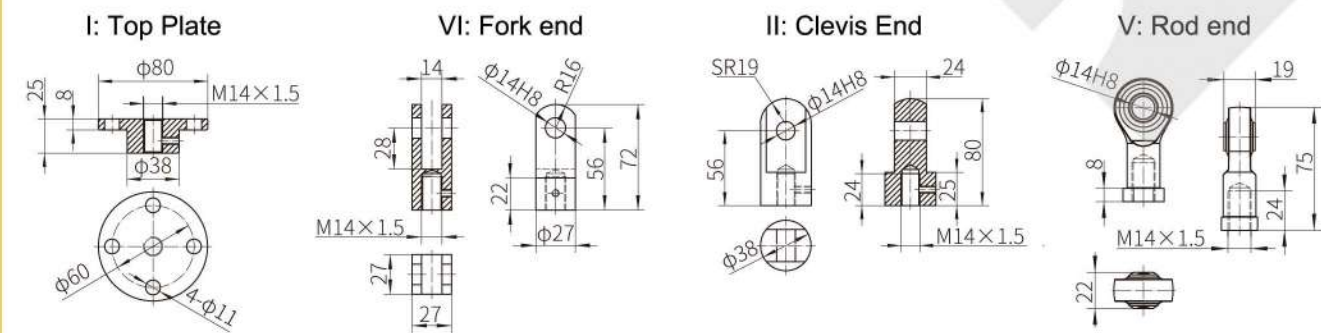


\*. Dimensions are subject to change without notice






**Overall Dimensions**

**JTQB15**

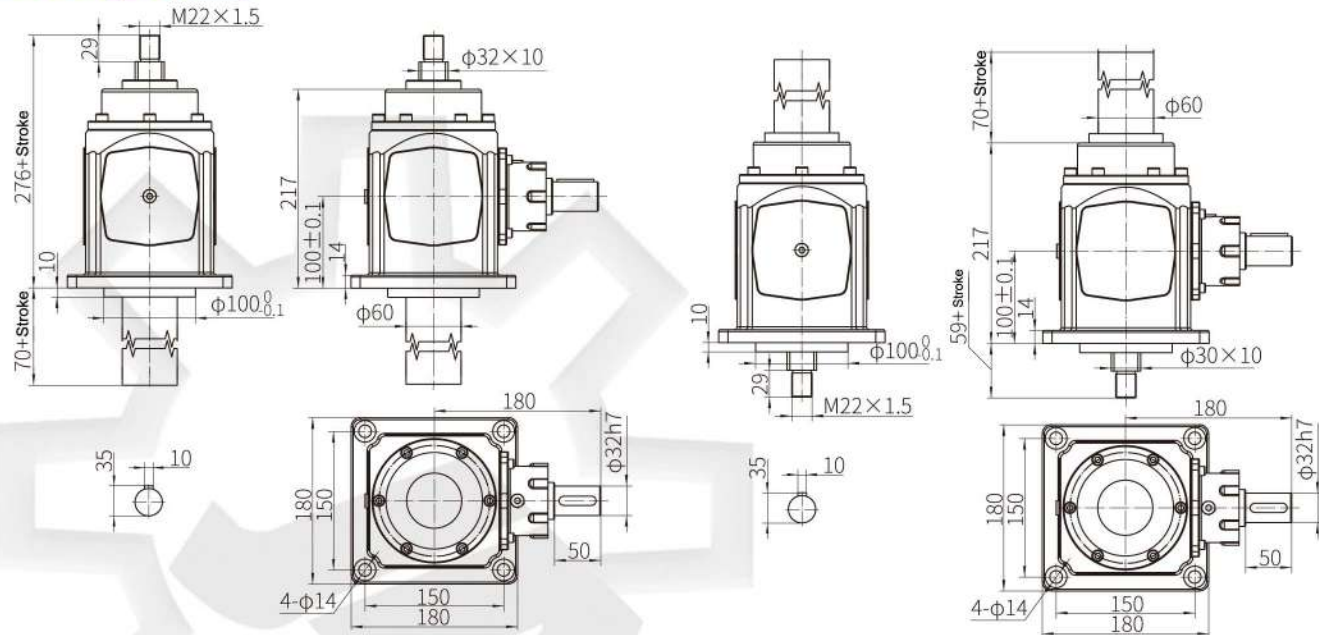

US: Upright - Translating


IS: Inverted - Translating

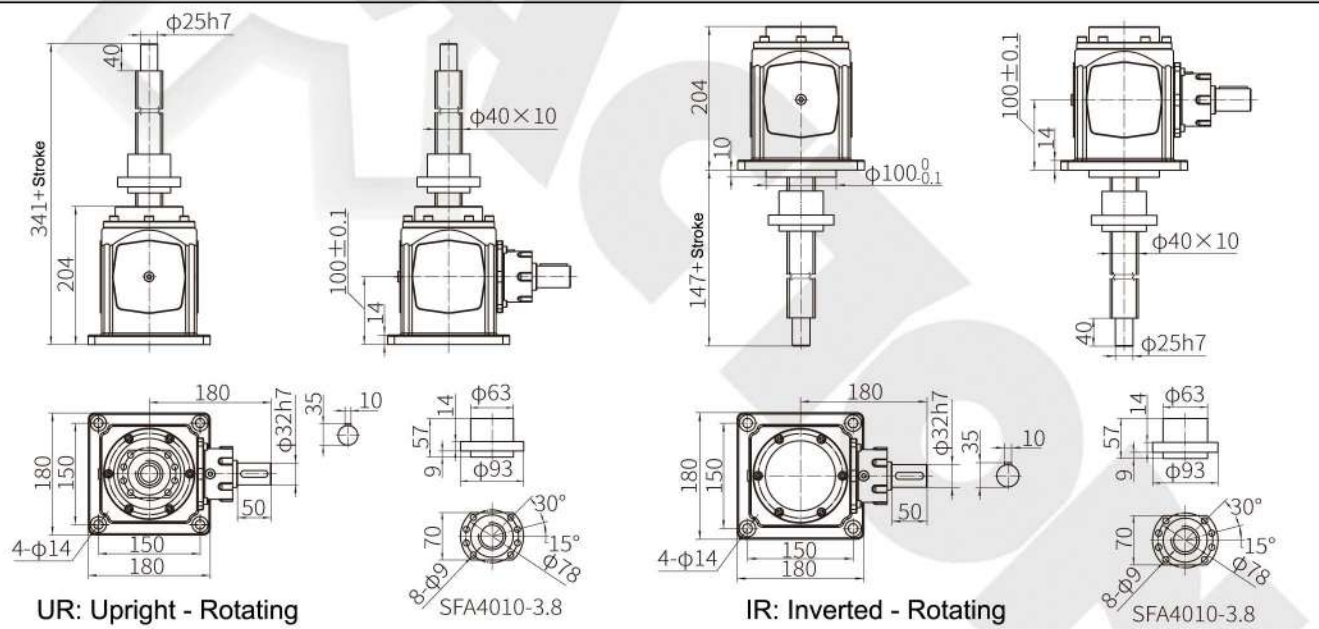


UR: Upright - Rotating

IR: Inverted - Rotating

I: Top Plate

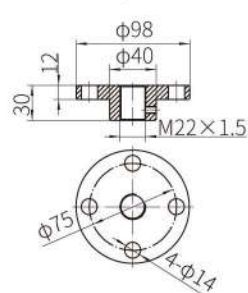

VI: Fork end

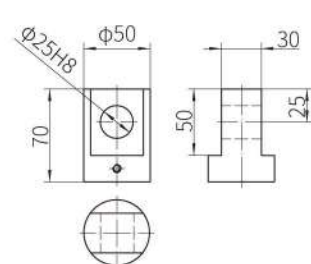

\*. Dimensions are subject to change without notice



**Other Products**

**Cubic Machine Screw Jack**

- Cubic design permits any mounting position.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 2.5 kN to 500 kN as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangement



**Cubic Ball Screw Jack**

- Cubic design permits any mounting position.
- High duty cycle, high precision, high speed, less power and long service life.
- Static load capacities from 10 kN to 350 kN as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation.
- Single jack, or synchronization of multiple jacks arrangements.



**Classic Machine Screw Jack**

- Classic design, no need to attach any construction elements to the housing.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 0.5 ton to 100 tons as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangements.



**Stainless Steel Screw Jack**

- Classic design, no need to attach any construction elements to
- Complete Stainless Steel Screw Jack design.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 1 ton to 20 tons as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking Stainless Steel trapezoidal screw offers maximum stroke of 7500 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangements.



**Other Products**

**Classic Ball Screw Jack**

- Classic design, no need to attach any construction elements to the housing.
- High duty cycle, high precision, high speed, less power and long service life.
- Static load capacities from 1 ton to 35 tons as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation
- Single jack, or synchronization of multiple jacks arrangements.



**Bevel Gear Machine Screw Jack**

- High efficiency, high lifting speed, high duty cycle, long lifespan.
- Spiral bevel gear mechanism are used, with 2:1, 2.5:1 and 3:1 ratios.
- Static load capacities from 400 Kg to 3500 Kg as Standard.
- Translating, Anti-rotation (keyed) and Rotating Screw configurations.
- Self locking trapezoidal screw offers maximum stroke of 6000 mm.
- Power source: Manual operation, Motor drive.
- Single jack, or synchronization of multiple jacks arrangement



**Bevel Gear Ball Screw Jack**

- Higher efficiency, higher lifting speed, higher duty cycle, longer lifespan.
- Spiral bevel gear mechanism are used, with 2:1, 2.5:1 and 3:1 ratios.
- Static load capacities from 400 Kg to 3500 Kg as Standard.
- Translating, Anti-rotation and Rotating Screw configurations.
- Not self-locking ball screw offers maximum stroke of 6000 mm.
- Power source: Brake motor drive. Not suited for manual operation.
- Single jack, or synchronization of multiple jacks arrangements.



**Screw Jack Lifting Systems**

- Lifting systems are not limited to the number of screw jacks. Commonly used are 2, 4, 6, 8 jack systems.
- Full synchronization, self-locking, precision positioning, easy installation and operation, maintenance free.
- From a few kilograms to heavy-duty several hundred tons.
- Complete lifting systems with geared motors, shafting and couplings available.
- Power source: Synchronized drive from a single electric motor.
- With Inverter driven motor, soft start and stop, variable lifting speeds are all available.





**Other Products**

**Cubic Bevel Gearbox**

- Modular design spiral bevel gearboxes with cubic housing.
- Ultra Compact Design. All-round tapped holes for universal mounting, 6 possible mounting positions.
- Gear ratios of 1:1, 2:1, 3:1, 4:1 and 5:1 are actual ones.
- Power Ratings up to 156 kW. Torque Ratings up to 1199 N.m.
- Gear transmission average efficiency up to 94%.
- 2-way, 3-way and 4-way Configurations.
- Solid Shaft, Hollow Shaft, and Direct motor mount or via motor flanges.
- High efficiency, high transmission capacity, low backlash, Noiseless operation, low running temperature and long service life.



**Classic Bevel Gearbox**

- Used in pairs case hardened alloy steel spiral bevel gears.
- Gear ratios of 1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1 and 5:1 are actual ones.
- Power Ratings up to 335 kW. Torque Ratings up to 5713 N.m.
- Gear transmission average efficiency up to 94%.
- 2-way, 3-way and 4-way Configurations.
- Solid Shaft, Hollow Shaft, and Direct motor mount or via motor flanges.
- Various Shafts Arrangements, Rotation Directions and Mounting Positions available.
- High efficiency, high transmission capacity, low backlash, noiseless operation, low running temperature and long service life.



**Lightweight Bevel Gearbox ( Aluminium Alloy)**

- Quality finished casing by die-casting, in lightweight aluminium alloy.
- Compact design, small-sized, ultra-lightweight, universal mounting.
- Utilizing carburized case-hardened spiral bevel gears
- Gear ratios of 1:1 and 2:1 are actual ones.
- Power Ratings up to 4.94 kW. Torque Ratings up to 40 N.m.
- Gear transmission average efficiency up to 94%
- 2-way and 3-way Configurations.
- High efficiency, low backlash, quiet operation, maintenance free, low running temperature and long service life.



**Other Products**

**Electric Cylinders**

- Be basically screw jacks with travelling nut, but with lifting cylinder design.
- High static loads, best for slow movement and low duty cycles.
- Static load capacities from 2.5 ton to 10 tons as Standard.
- Self-locking, precise positioning, and uniform speed.
- Power source: Manual operation, Motor drive.
- Single unit, or synchronization of multiple units.
- A better choice over hydraulic actuators or pneumatic cylinders with this clean alternative, simpler to install, control, low maintenance and a quieter solution.



**Electric Linear Actuators**

- Parallel or In-Line drive configurations.
- Self-locking ACME screw and nut, driven by an electric motor, through a reduction gearbox.
- Low maintenance due to high-quality grease and enclosed design.
- Load capacities from 100 Kgf to 15 tons as Standard (Parallel)
- Load capacities from 10 Kgf to 1000 Kgf as Standard (In-Line).
- Low noise system, higher dynamic capacity, higher speed capability and longer life.
- Low power consumption and running costs, no oil leaks, contamination or fire risk.
- Easy installation with two trunnion mounting feet, no pipework, powerpack and valves.
- Be a real alternative to pneumatic and hydraulic cylinders.



**Customized and molded products**

